

FICHA DE PRODUCTO / FICHE PRODUIT / PRODUCT SHEET



FANCOIL

UNIDAD MURAL DE 2 TUBOS /
MURAL 2 TUBES / WALL 2 PIPES

Producto certificado por:
Produit certifié par:
Product certified by:




CARACTERÍSTICAS / CARACTÉRISTIQUES / FEATURES

Modelo / Modèle / Model	KFC-AY-2T-250D	KFC-AY-2T-400D	KFC-AY-2T-600D
Capacidad frigorífica / Capacité frigorifique / Cooling capacity kW	2,59 (2,39 - 2,7)	3,3 (2,88 - 3,81)	4,26 (3,79 - 4,87)
Capacidad calorífica / Capacité calorifique / Heating capacity kW	3,03 (2,63-3,29)	4,33 (3,77 - 5,08)	5,57 (4,77 - 6,31)
P. absorbida frío / P. absorbée froid / P. Input cooling W	11 (10 - 13)	22 (15 - 34)	26 (18 - 38)
P. absorbida calor / P. absorbée chaud / P. Input heating W	10 (8 - 12)	20 (14 - 31)	23 (16 - 33)
Caudal de agua / Débit d'eau / Rated water Flow m3/h	0,46 (0,42 - 0,48)	0,57 (0,51 - 0,67)	0,72 (0,65 - 0,85)
Perdida de carga frío / Chute de presión de l'évaporateur frigorifique / Evaporator pressure drop cooling kPa	28,63 (25,36 - 31,61)	41,23 (33,02 - 56,75)	39,47 (33,66 - 50,68)
Perdida de carga calor / Chute de presión de l'évaporateur calorifique / Evaporator pressure drop heating kPa	30,25 (26,53 - 37,49)	37,88 (30,34 - 61,94)	36,3 (30,3 - 51,65)
Caudal de aire / Débit d'air / Airflow m3/h	400/454/492	590/689/825	717/849/979
Presión sonora int./ Pression acoustique int./ Sound pressure ind. db(A)	27/30/32	35/39/45	35/40/44
Conexiones hidráulicas / Raccordements hydrauliques / Hydraulic connections	Ø20(3/4")		


CONEXIONADO ELÉCTRICO / RACCORDEMENT ÉLECTRIQUE / ELECTRIC CONNECTIONS

Tensión alimentación / Tension d'alimentation / Power Supply	220-240 V / 1 fase / 50 Hz
Cable alimentación / Câble d'alimentation / Power supply	(2+Tierra) x 2,5 mm

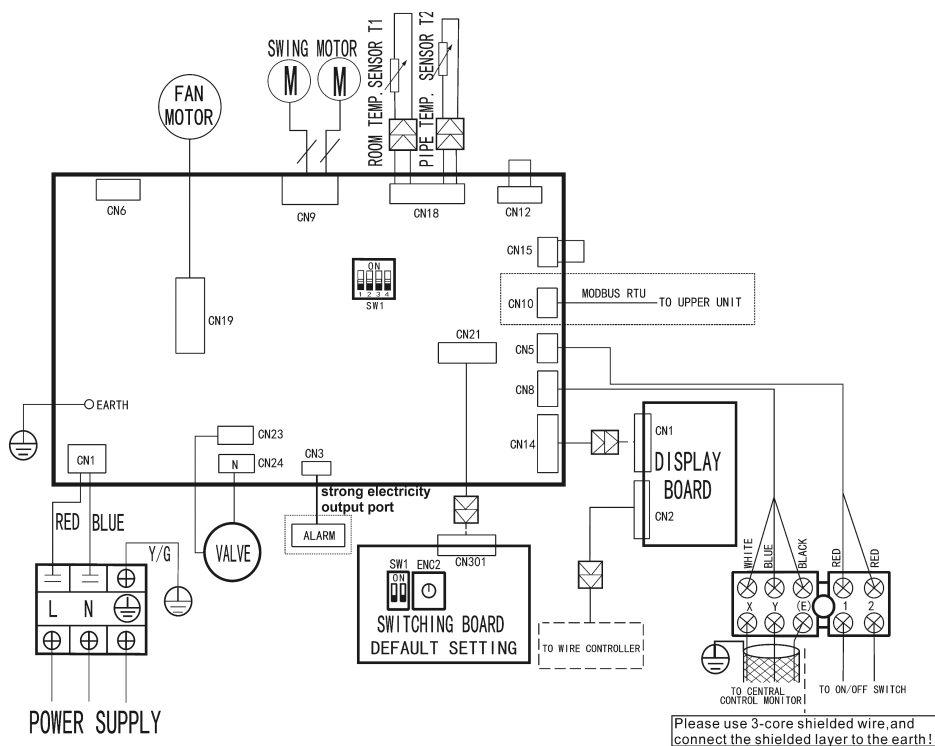


DIMENSIONES Y PESO / DIMENSIONS ET POIDS / WEIGHT AND DIMENSIONS

KFC-AY-2T-250D y KFC-AY-2T-400D: 12,7 kg

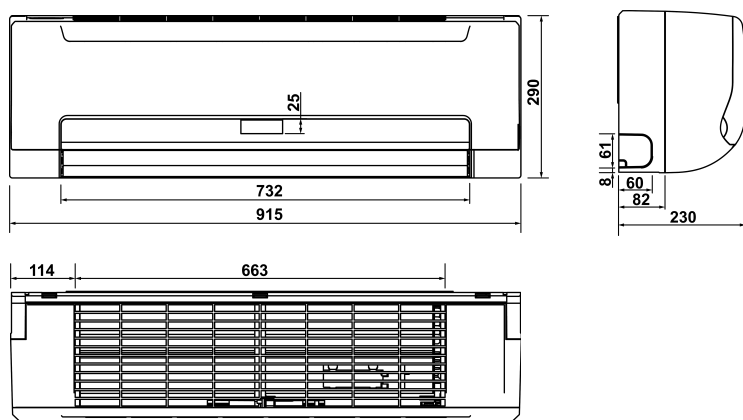

Espacio de servicio

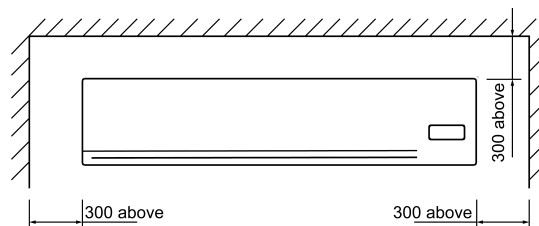

KFC-AY-2T-600D: 14,9 kg

