

One Way Cassette

PRODUCT SHEET

KCOF-22 DN4.0 / KCOF-36 DN4.0 / KCOF-71 DN4.0



KI-03 S

Recommended controller




Product certified by: **CE**



FEATURES

Model	KCOF-22 DN4.0	KCOF-36 DN4.0	KCOF-71 DN4.0
Cooling capacity	2,20 kW	3,60 kW	7,10 kW
Heating capacity	2,40 kW	4 kW	8 kW
Heating power input	25 W	30 W	60 W
Airflow	275/404/523 m ³ /h	315/456/573 m ³ /h	592/749/933 m ³ /h
Sound pressure	30/34/37 dB(A)	34/36/39 dB(A)	37/41/44 dB(A)
Pipe diameter	Ø1/4" / Ø1/2"	Ø1/4" / Ø1/2"	Ø3/8" / Ø5/8"
Drain tube diameter	Ø32 mm	Ø32 mm	Ø32 mm
Power supply	220-240 V / 1 / 50 Hz		
Max. input	15 A	15 A	15 A
Interconnection cable	3x2,50 mm ²	3x2,50 mm ²	3x2,50 mm ²
Com. bus shielded	3x0,75 mm ²	3x0,75 mm ²	3x0,75 mm ²

WIRING DIAGRAM

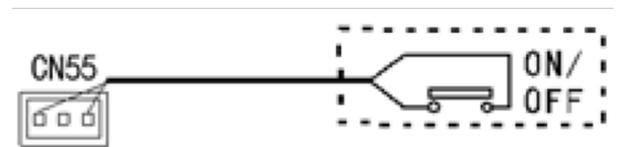
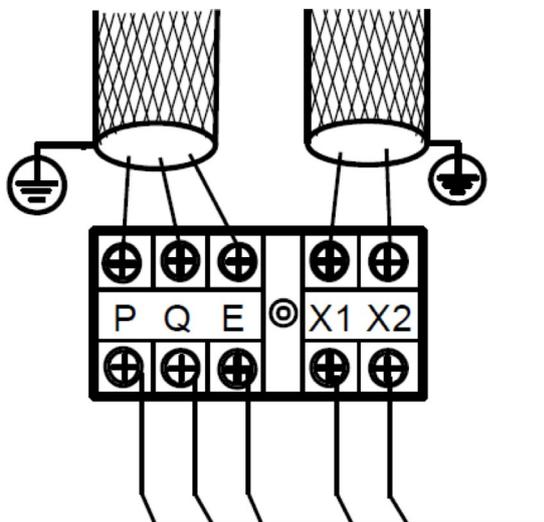


Power supply terminal

NOTES:



- (1) The data and specifications present in this sheet may vary without notice.
- (2) The images on this sheet are indicative and may be different from the final machine.

DIMENSIONS & WEIGHT

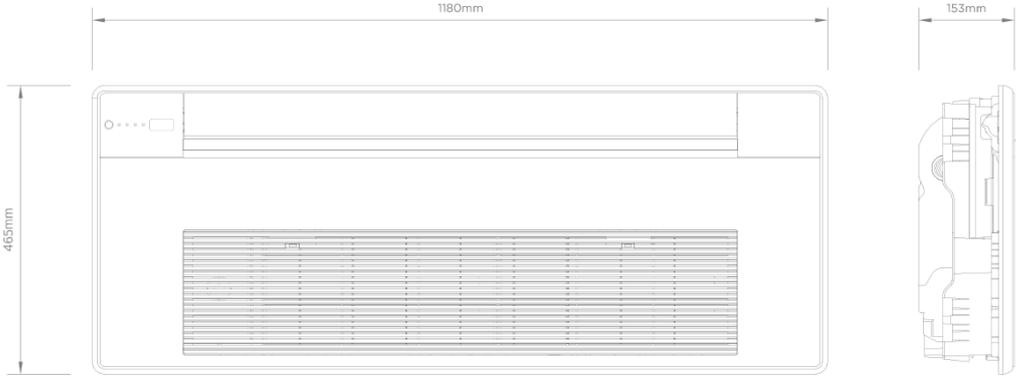Model	KCOF-22 DN4.0	KCOF-36 DN4.0
		
Weight	11,80 kg	12,30 kg

Model	KCOF-71 DN4.0
	
Weight	17,60 kg

INSTALLATION

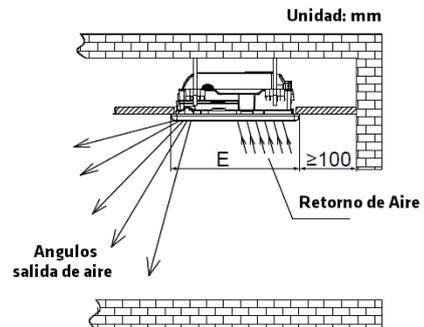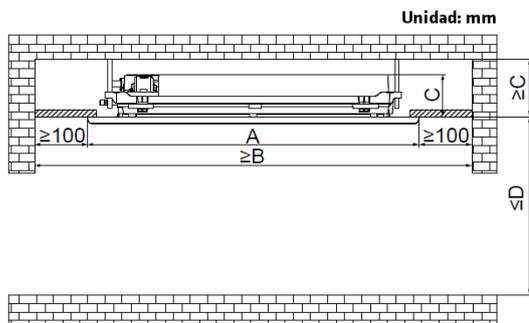

Model	KCOF-22 DN4.0	KCOF-36 DN4.0	KCOF-71 DN4.0
A	1.180 mm	1.180 mm	1.350 mm
B	1.380 mm	1.380 mm	1.550 mm
C	153 mm	153 mm	189 mm
D	3.200 mm	3.200 mm	489 mm
E	465 mm	465 mm	505 mm