


Cassette Artflux 360° (600x600)

KCIF-17 DN4.0 / KCIF-22 DN4.0 / KCIF-28 DN4.0

PRODUCT SHEET

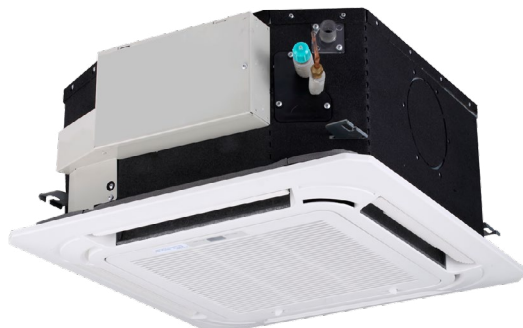

KI-03 S

Recommended controller



Product certified by:



FEATURES

Model	KCIF-17 DN4.0	KCIF-22 DN4.0	KCIF-28 DN4.0
Cooling capacity	1,70 kW	2,20 kW	2,80 kW
Heating capacity	2,20 kW	2,40 kW	3,20 kW
Heating power input	35 W	35 W	35 W
Airflow	280/300/380 m³/h	405/503/576 m³/h	405/503/576 m³/h
Sound pressure	22/29/35 dB(A)	22/29/35 dB(A)	22/29/35 dB(A)
Pipe diameter	Ø1/4" / Ø1/2"	Ø1/4" / Ø1/2"	Ø1/4" / Ø1/2"
Drain tube diameter	Ø25 mm	Ø25 mm	Ø25 mm
Power supply	220-240 V / 1 ph / 50 Hz	220-240 V / 1 ph / 50 Hz	220-240 V / 1 ph / 50 Hz
Max. input	15 A	15 A	15 A
Interconnection cable	3x2,50 mm²	3x2,50 mm²	3x2,50 mm²
Com. bus shielded	3x0,75 mm²	3x0,75 mm²	3x0,75 mm²

WIRING DIAGRAM

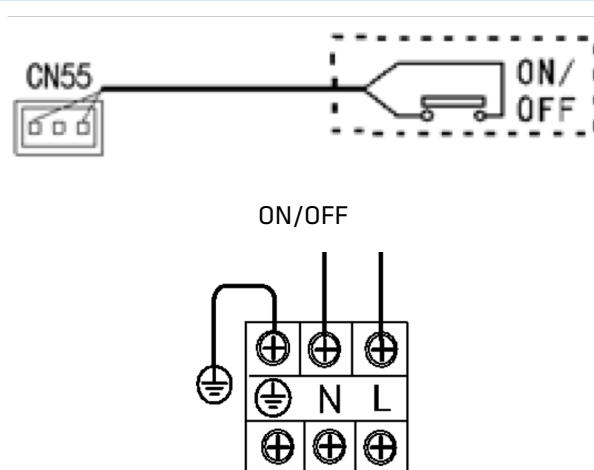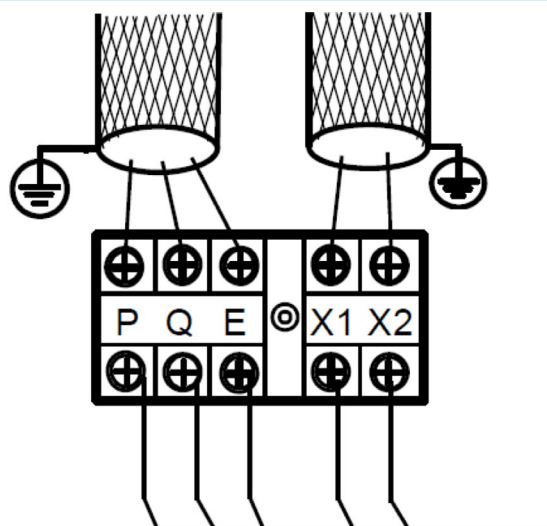



Power supply terminal

NOTES:



(1) The data and specifications present in this sheet may vary without notice.

(2) The images on this sheet are indicative and may be different from the final machine.

DIMENSIONS & WEIGHT

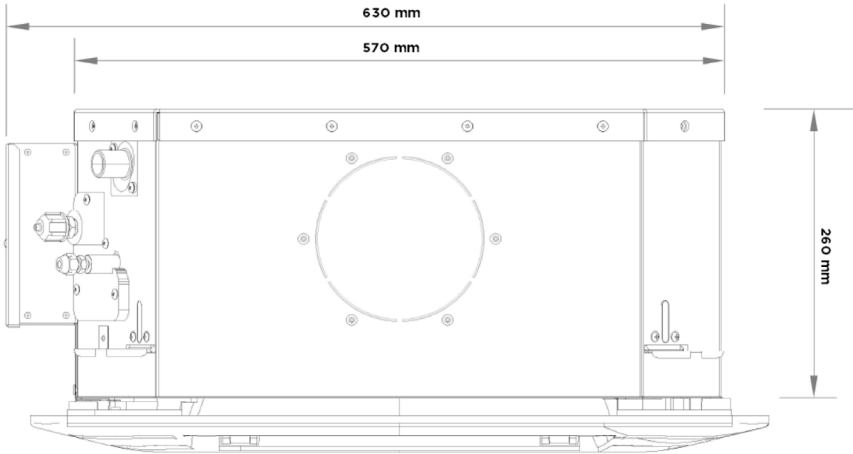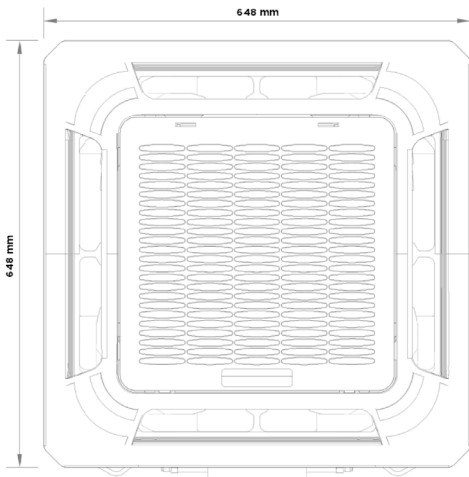Model	KCIF-17 DN4.0	KCIF-22 DN4.0	KCIF-28 DN4.0
			
Weight	18 kg	18 kg	18 kg
Panel Model			
Weight	2,50 kg		


INSTALLATION

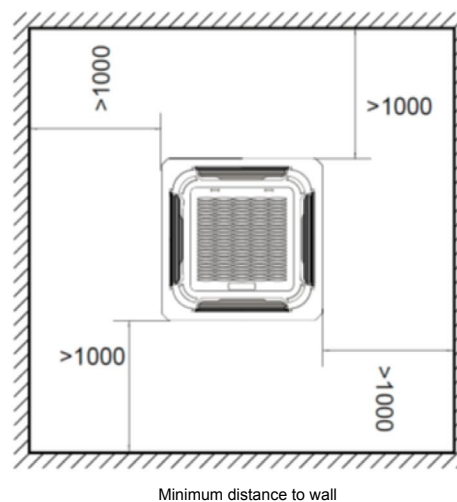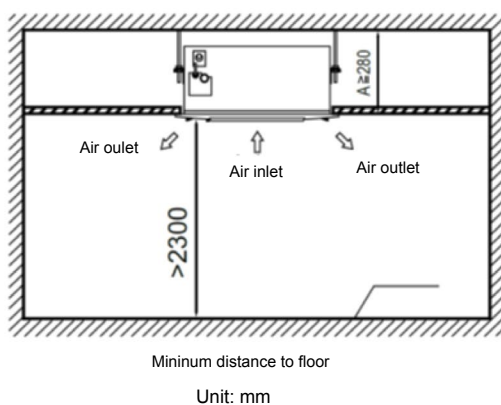

Cassette Artflux 360° (600x600)

KCIF-36 DN4.0 / KCIF-45 DN4.0 / KCIF-52 DN4.0

PRODUCT SHEET

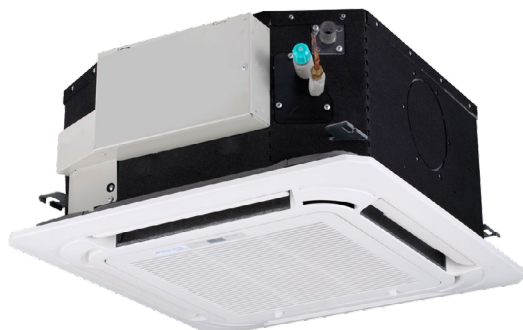

KI-03 S

Recommended controller



Product certified by:



FEATURES

Model	KCIF-36 DN4.0	KCIF-45 DN4.0	KCIF-52 DN4.0
Cooling capacity	3,60 kW	4,50 kW	5,20 kW
Heating capacity	4 kW	5 kW	5,60 kW
Heating power input	40 W	50 W	62 W
Airflow	400/516/604 m³/h	400/516/604 m³/h	350/446/635 m³/h
Sound pressure	28/32/41 dB(A)	28/32/41 dB(A)	28/32/52 dB(A)
Pipe diameter	Ø1/4" / Ø1/2"	Ø1/4" / Ø1/2"	Ø1/4" / Ø1/2"
Drain tube diameter	Ø25 mm	Ø25 mm	Ø25 mm
Power supply	220-240 V / 1 ph / 50 Hz	220-240 V / 1 ph / 50 Hz	220-240 V / 1 ph / 50 Hz
Max. input	15 A	15 A	15 A
Interconnection cable	3x2,50 mm²	3x2,50 mm²	3x2,50 mm²
Com. bus shielded	3x0,75 mm²	3x0,75 mm²	3x0,75 mm²

WIRING DIAGRAM

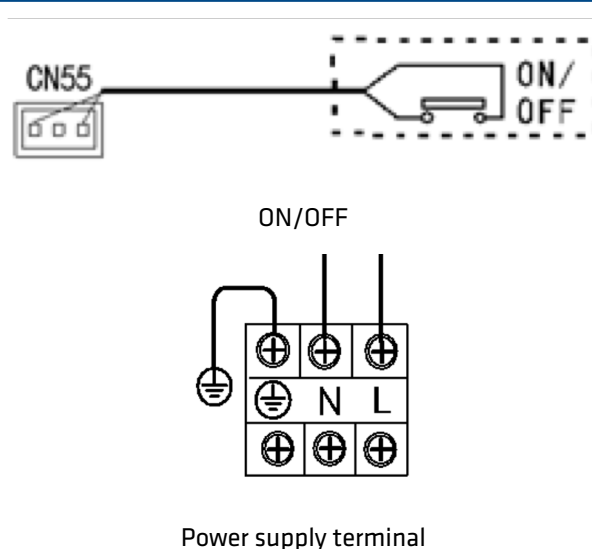
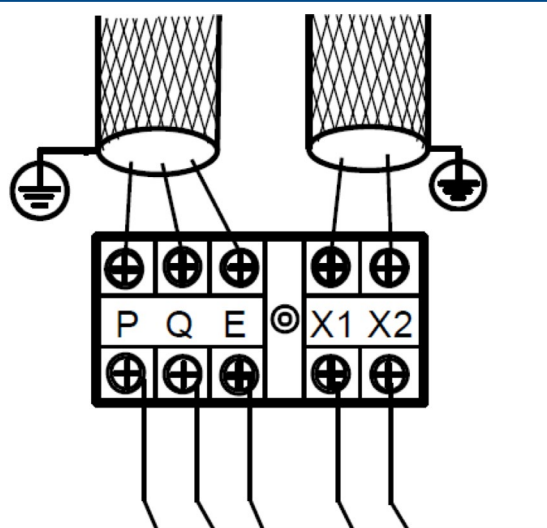


NOTES:

(1) The data and specifications present in this sheet may vary without notice.

(2) The images on this sheet are indicative and may be different from the final machine.

DIMENSIONS & WEIGHT

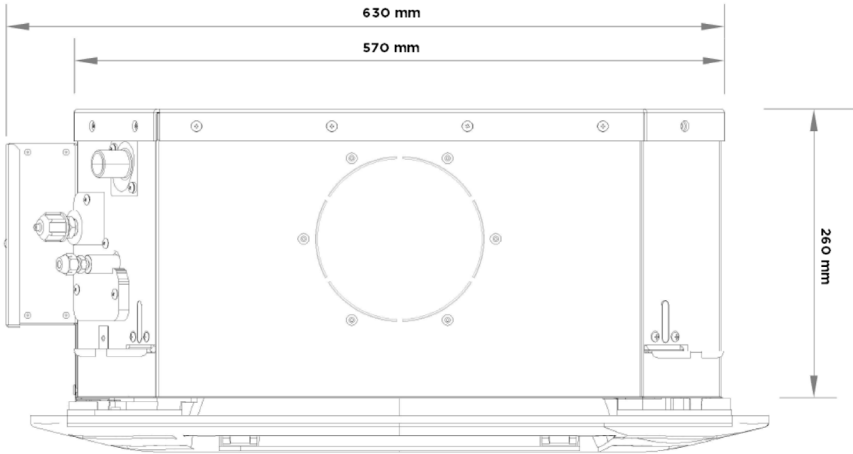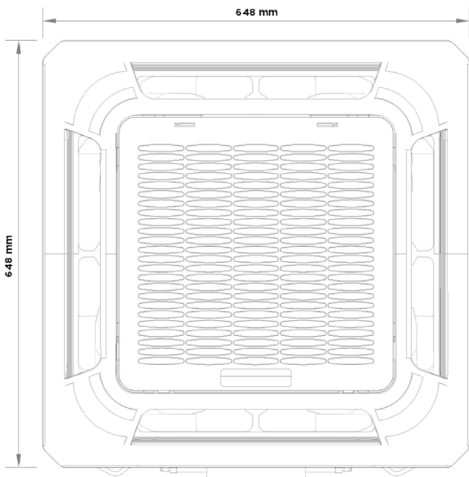Model	KCIF-36 DN4.0	KCIF-45 DN4.0	KCIF-52 DN4.0
			
Weight	19,20 kg	19,20 kg	19,20 kg
Panel Model			
Weight	2,50 kg		

INSTALLATION

