

Ceiling/Floor

PRODUCT SHEET

KPCF-56 DN4.0 / KPCF-90 DN4.0 / KPCF-140 DN4.0



KI-03 S

Recommended controller




Product certified by: 



FEATURES

Model	KPCF-56 DN4.0	KPCF-90 DN4.0	KPCF-140 DN4.0
Cooling capacity	5,60 kW	9 kW	14 kW
Heating capacity	6,30 kW	10 kW	15 kW
Heating power input	115 W	130 W	180 W
Airflow	720/830/930 m ³ /h	1.050/1.170/1.280 m ³ /h	1.580/1.700/1.890 m ³ /h
Sound pressure	38/41/43 dB(A)	40/43/45 dB(A)	42/45/47 dB(A)
Pipe diameter	Ø3/8" / Ø5/8"	Ø3/8" / Ø5/8"	Ø3/8" / Ø5/8"
Drain tube diameter	Ø16 mm	Ø16 mm	Ø16 mm
Power supply	220-240 V / 1 / 50 Hz		
Max. input	15 A	15 A	15 A
Interconnection cable	3x2,50 mm ²	3x2,50 mm ²	3x2,50 mm ²
Com. bus shielded	3x0,75 mm ²	3x0,75 mm ²	3x0,75 mm ²

WIRING DIAGRAM

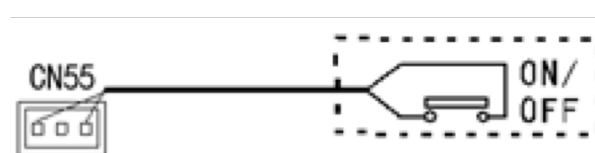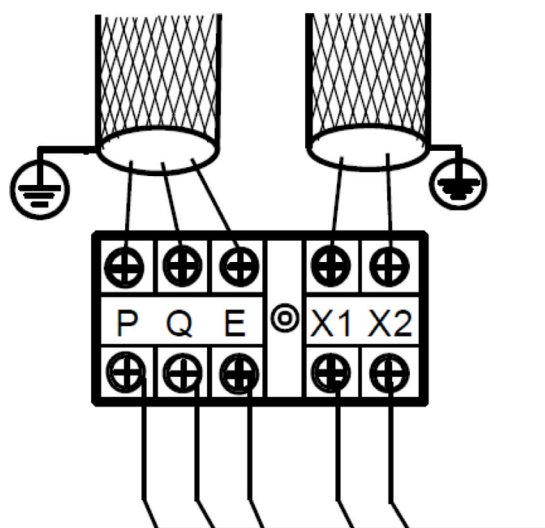


Power supply terminal

NOTES:

(1) The data and specifications present in this sheet may vary without notice.

(2) The images on this sheet are indicative and may be different from the final machine.

DIMENSIONS & WEIGHT

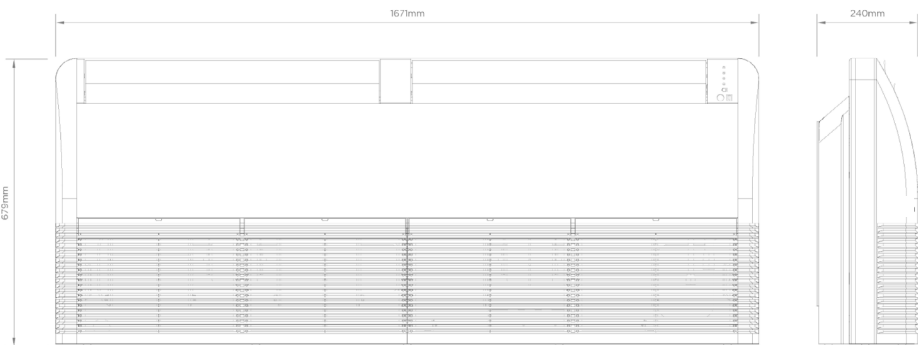Model	Weight	
KPCF-56 DN4.0	28 kg	
KPCF-90 DN4.0	35 kg	
KPCF-140 DN4.0	48 kg	

INSTALLATION

