

Floor Standing Cased

KSEF-56 DN4.0 / KSEF-71 DN4.0



KI-03 S

Recommended controller




Product certified by: 



FEATURES

Model	KSEF-56 DN4.0	KSEF-71 DN4.0
Cooling capacity	5,60 kW	7,10 kW
Heating capacity	6,30 kW	8 kW
Heating power input	88 W	110 W
Airflow	830/970/1.150 m ³ /h	870/1.100/1.380 m ³ /h
Sound pressure	31/35/41 dB(A)	33/39/44 dB(A)
Pipe diameter	Ø3/8" / Ø5/8"	Ø3/8" / Ø5/8"
Drain tube diameter	Ø16 mm	Ø16 mm
Power supply	220-240 V / 1 / 50 Hz	
Max. input	15 A	15 A
Interconnection cable	3x2,50 mm ²	3x2,50 mm ²
Com. bus shielded	3x0,75 mm ²	3x0,75 mm ²

WIRING DIAGRAM

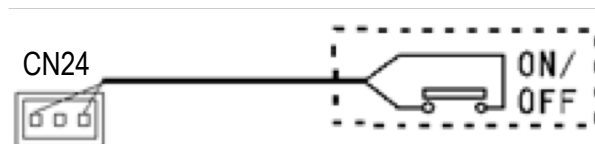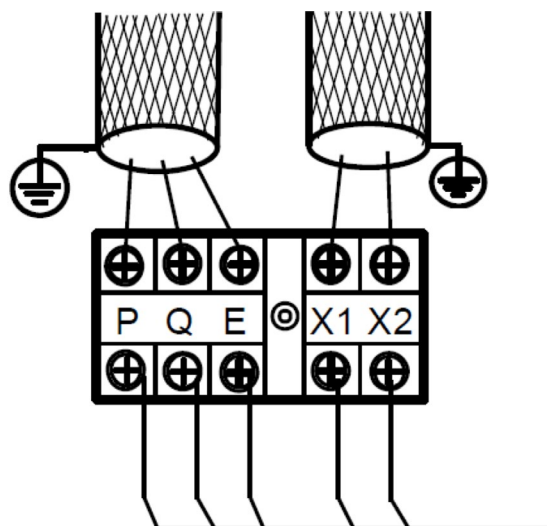


Power supply terminal

NOTES:


(1) The data and specifications present in this sheet may vary without notice.

(2) The images on this sheet are indicative and may be different from the final machine.

DIMENSIONS & WEIGHT

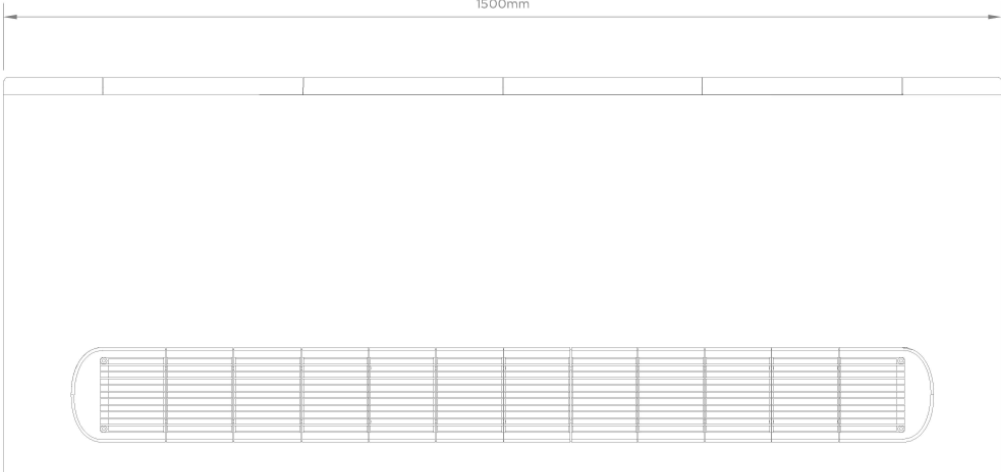Model	KSEF-56 DN4.0	KSEF-71 DN4.0
1500mm 592mm  220mm 		
Weight	30,50 kg	30,50 kg

INSTALLATION

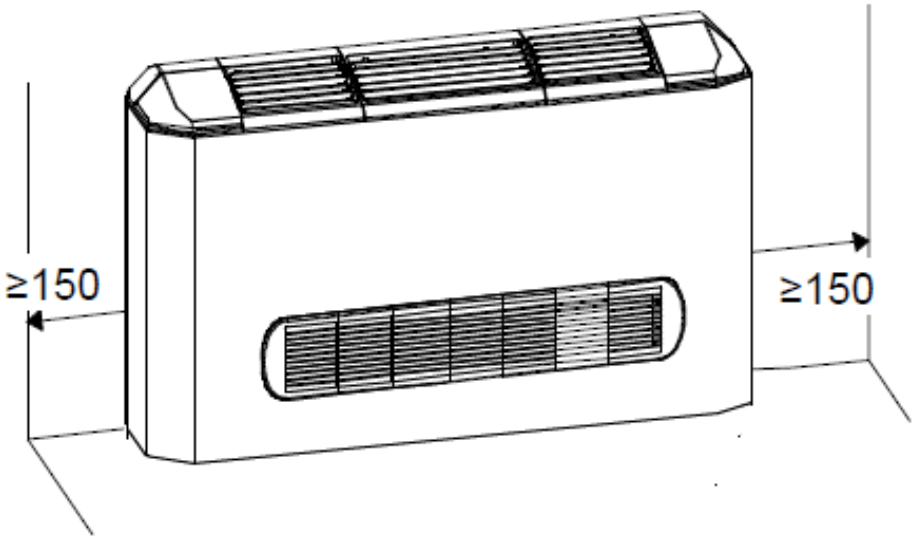

Floor Standing Uncased

KSF-56 DN4.0 / KSF-71 DN4.0



KI-03 S




Recommended controller

Product certified by: 


FEATURES

Model	KSEF-56 DN4.0	KSEF-71 DN4.0
Cooling capacity	5,60 kW	7,10 kW
Heating capacity	6,30 kW	8 kW
Heating power input	88 W	110 W
Airflow	830/970/1.150 m ³ /h	870/1.100/1.380 m ³ /h
Sound pressure	31/35/41 dB(A)	33/39/44 dB(A)
Pipe diameter	Ø3/8" / Ø5/8"	Ø3/8" / Ø5/8"
Drain tube diameter	Ø16 mm	Ø16 mm
Power supply	220-240 V / 1 / 50 Hz	
Max. input	15 A	15 A
Interconnection cable	3x2,50 mm ²	3x2,50 mm ²
Com. bus shielded	3x0,75 mm ²	3x0,75 mm ²

WIRING DIAGRAM

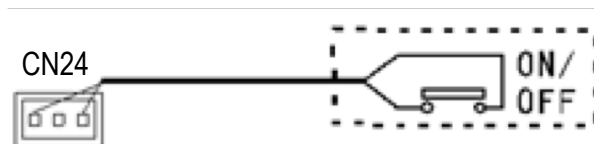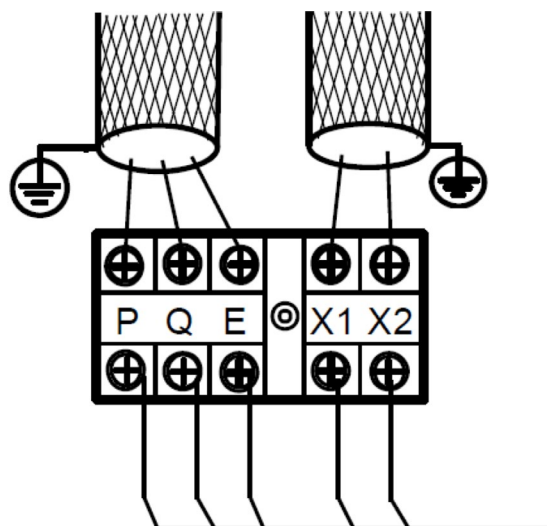


Power supply terminal

NOTES:

(1) The data and specifications present in this sheet may vary without notice.

(2) The images on this sheet are indicative and may be different from the final machine.

DIMENSIONS & WEIGHT

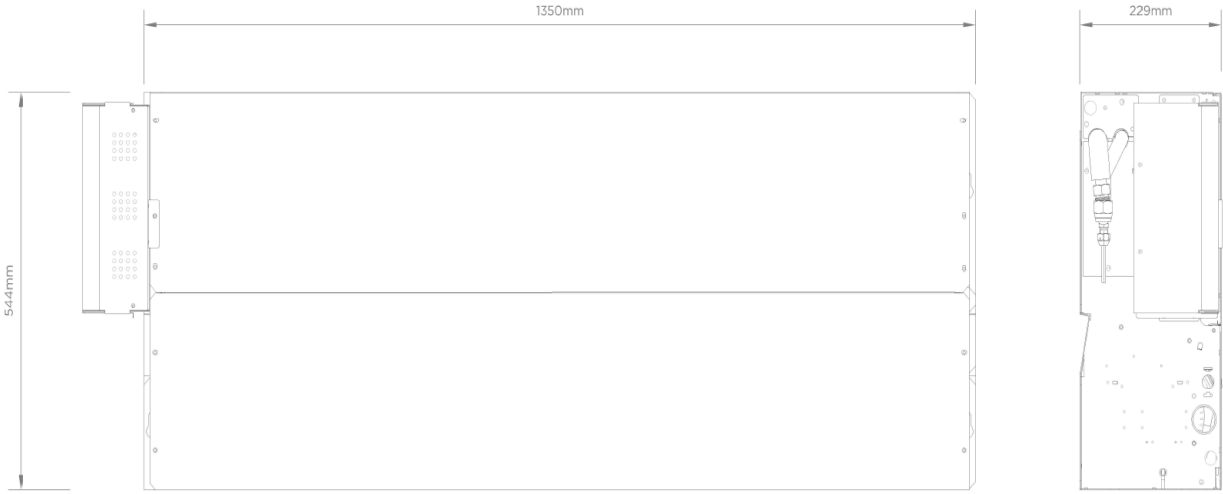Model	KSF-56 DN4.0	KSF-71 DN4.0
		
Weight	30,50 kg	30,50 kg

INSTALLATION

