

KAHU

PRODUCT SHEET






KCT-02.1 SR
Standard controller



FEATURES

Model	KAHU-90.3	KAHU-200.3	KAHU-360.3	KAHU-560.3
Cooling capacity	2 - 8 kW	9 - 20 kW	21 - 36 kW	37 - 56 kW
Pipe diameter	Ø3/8"	Ø3/8"	Ø1/2"	Ø5/8"
Power supply	220-240 V / 1 / 50 Hz			
Interconnection cable	3x2,50 mm ²	3x2,50 mm ²	3x2,50 mm ²	3x2,50 mm ²
Com. bus shielded	3x1,50 mm ²	3x1,50 mm ²	3x1,50 mm ²	3x1,50 mm ²

WIRING DIAGRAM

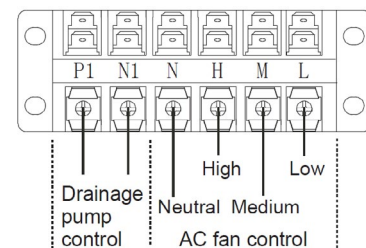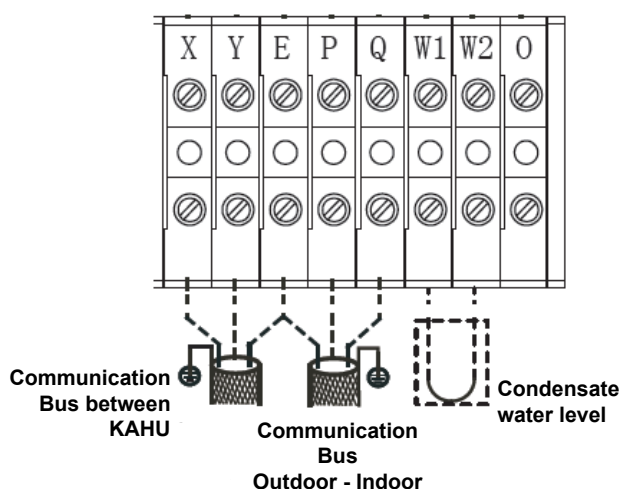

Power supply terminal


NOTES:

- (1) The data and specifications present in this sheet may vary without notice.
- (2) The images on this sheet are indicative and may be different from the final machine.

DIMENSIONS & WEIGHT

Model	KAHU-90.3	KAHU-200.3	KAHU-360.3	KAHU-560.3
Weight	8,40 kg	8,40 kg	8,70 kg	8,90 kg

INSTALLATION DISTANCES

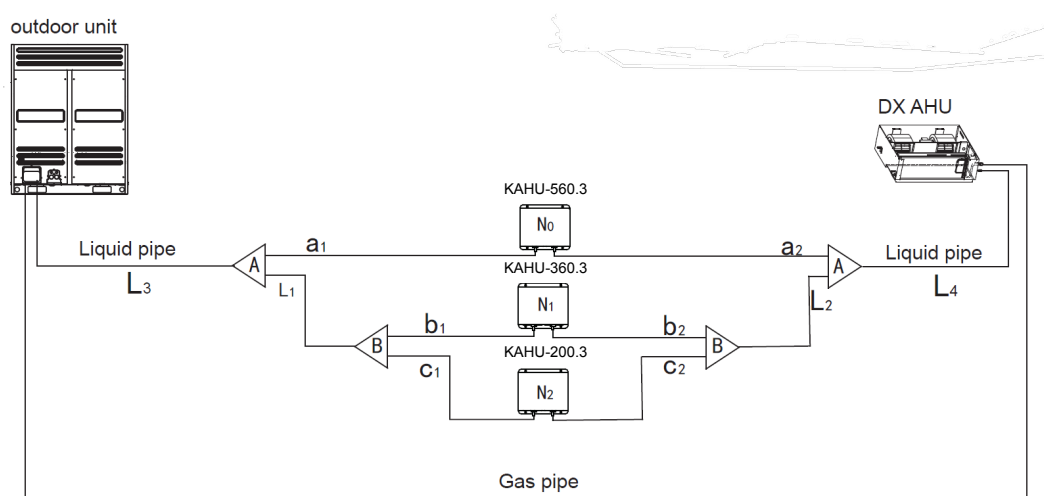

Max. distance from each control to DX AHU	8 m
a_1	≤ 10 m
$a_2 + L_4$	≤ 8 m
$b_2 + L_2 + L_4$	≤ 8 m
$L_1 + b_1$	≤ 10 m
$L_1 + c_1$	≤ 10 m
$c_2 + L_2 + L_4$	≤ 8 m