



DHW Heat Pump

PRODUCT SHEET

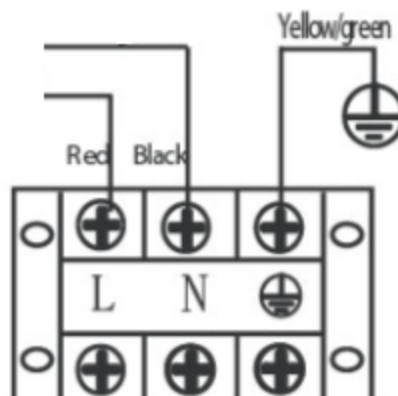

 Product certified by:  


FEATURES

Model	COMPAK KHPA 16/190	COMPAK KHPA 23/300
Heating capacity ¹	1,62 kW	2,30 kW
Heating power input ¹	0,42 kW	0,53 kW
Tank volume	176 L	284 L
Air flow	270 m ³ /h	414 m ³ /h
Sound pressure	36,60 dB(A)	38,20 dB(A)
Working weight	268 kg	398 kg
Max. temperature DHW	70°C	70°C
Temperature range outdoor (without backup heater)	-7°C - 43°C	-7°C - 43°C
Hydraulic connections	Ø3/4"	Ø3/4"
ASP	25 Pa	25 Pa
Backup heater	3 kW	3 kW
Exchanger	Aluminium coil	
Tank	ABS	
Power supply	220-240 V / 1 / 50 Hz	
Power wiring	4 mm	4 mm
Max. overcurrent protection	40 A	40 A

¹ Outdoor temperature 15/12°C (DB/WB), water inlet 15°C, water outlet 45°C

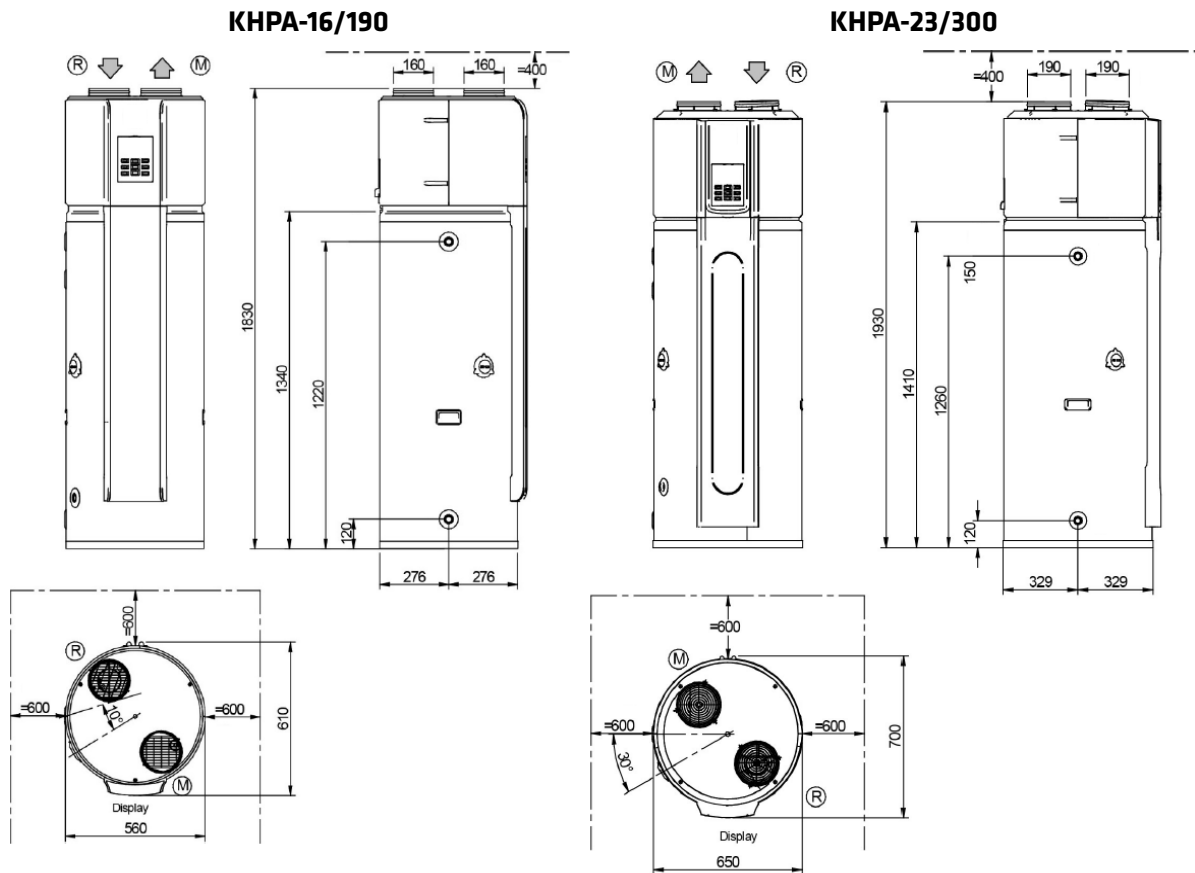
WIRING DIAGRAM



NOTES:

- (1) The data and specifications present in this sheet may vary without notice.
- (2) The images on this sheet are indicative and may be different from the final machine.

DIMENSIONS OF UNIT & SPACE FOR INSTALLATION



RECOMMENDED CHANNELING OF AIR

