

Wall-Mounted

PRODUCT SHEET



KID-02 S

Recommended controller


Product certified by:



FEATURES

Model	KFC-AY-2T-250D1	KFC-AY-2T-400D1	KFC-AY-2T-600D1
Cooling capacity	2,59 (2,39/2,70) kW	3,30 (2,88/3,81) kW	4,26 (3,79/4,87) kW
Heating capacity	3,03 (2,63/3,29) kW	4,33 (3,77/5,08) kW	5,57 (4,77/6,31) kW
Cooling power input	11 (10/13) W	22 (15/34) W	26 (18/38) W
Heating power input	10 (8/12) W	20 (14/31) W	23 (16/33) W
Airflow	400/454/492 m³/h	590/689/825 m³/h	717/849/979 m³/h
Sound pressure	27/30/32 dB(A)	35/39/45 dB(A)	35/40/44 dB(A)
Water flow	0,46 (0,42/0,48) m³/h	0,57 (0,51/0,67) m³/h	0,72 (0,65/0,85) m³/h
Evaporator pressure drop cool.	28,63 (25,36/31,61) kPa	41,23 (33,02/56,75) kPa	39,47 (33,66/50,68) kPa
Evaporator pressure drop heat.	30,25 (16,53/37,49) kPa	37,88 (30,34/61,94) kPa	36,30 (30,30/51,65) kPa
Hydraulic connections	Ø3/4"	Ø3/4"	Ø3/4"
Power supply	220-240 V / 1 / 50 Hz		
Power wiring	(2+T)x2,50 mm²		

WIRING DIAGRAM

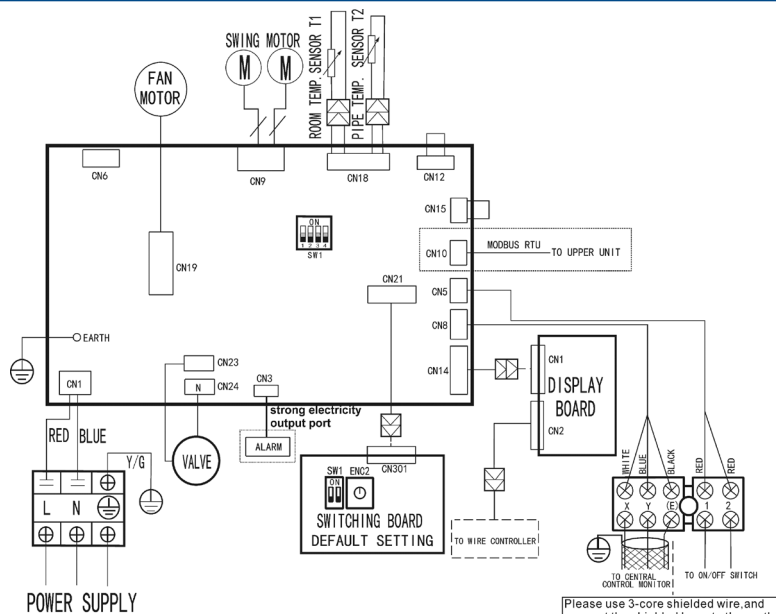


NOTES:

(1) The data and specifications present in this sheet may vary without notice.

(2) The images on this sheet are indicative and may be different from the final machine.

DIMENSIONS & WEIGHT

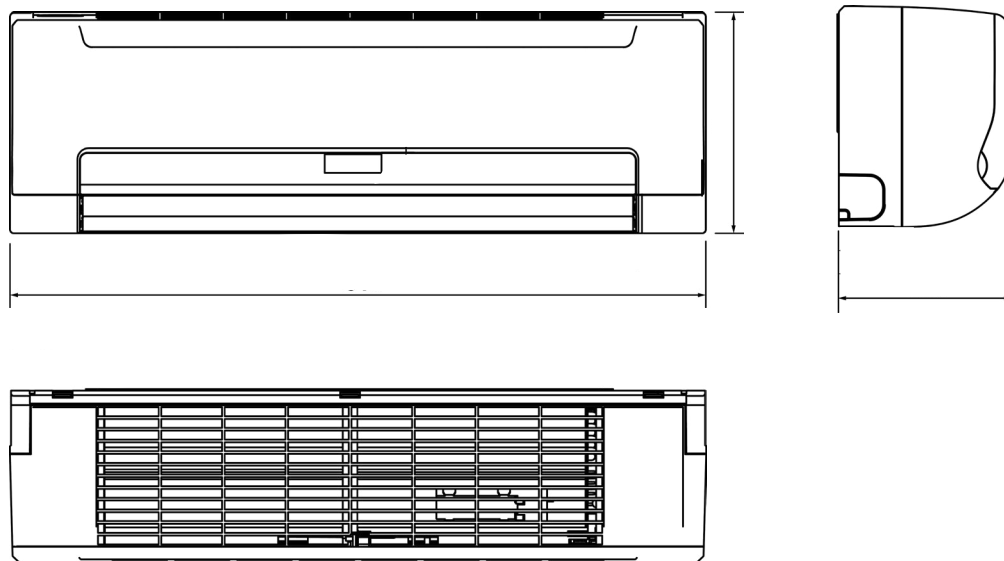

Model	Width	Height	Depth	Weight
KFC-AY-2T-250D1	915 mm	290 mm	230 mm	12,70 kg
KFC-AY-2T-400D1	915 mm	290 mm	230 mm	12,70 kg
KFC-AY-2T-600D1	1.072 mm	315 mm	230 mm	14,90 kg

INSTALLATION

