


Ducts

PRODUCT SHEET



KC-03.1 SPS
Recommended controller

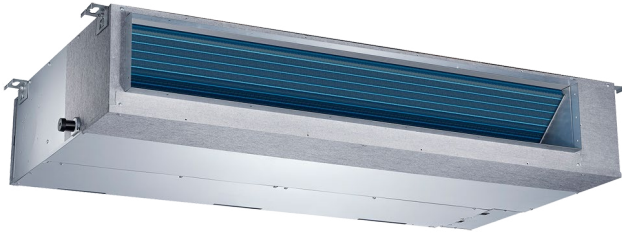


Product certified by:



FEATURES

Model	KPDC-140 DTN11
Cooling capacity	13,50 kW
Cooling power input	5.250 W
Heating capacity	14,55 kW
Heating power input	4.916 W
ErP Classification cold/heat	160 Pa
Airflow (indoor)	2.120/2.350/2.600 m ³ /h
Sound pressure (indoor)	35,40/38,30/41,80 dB(A)
Airflow (outdoor)	3.600 m ³ /h
Sound pressure (outdoor)	64 dB(A)
Power supply	380-415 V / 3 / 50 Hz
Max. input	15 A
Power wiring (indoor)	(2+T)x2,50 mm ²
Power wiring (outdoor)	(4+T)x4 mm ²
Communication wiring	2x1,50 mm ²
Com. bus shielded	3x1,50 mm ²

WIRING DIAGRAM

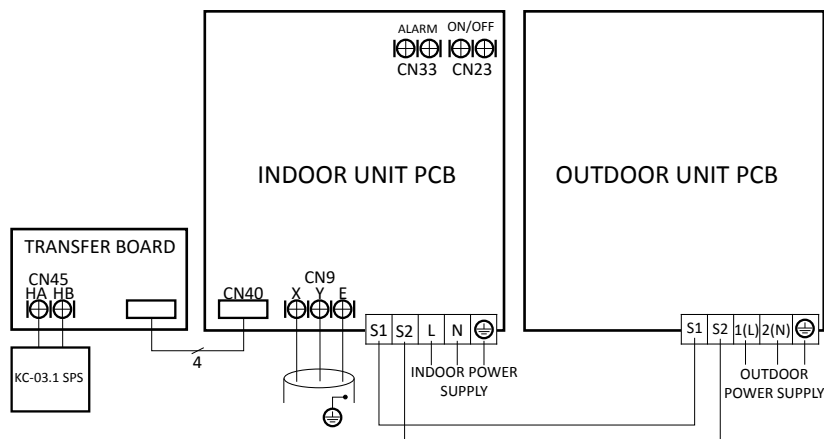


NOTES:

- (1) The data and specifications present in this sheet may vary without notice.
 (2) The images on this sheet are indicative and may be different from the final machine.


COOLING CONNECTION

Model	KPDC-140 DTN11	
Refrigerating pipes	Ø3/8" / Ø5/8"	
Refrigerant charge / Additional charge	4,30 kg / 0,03 kg	
Indoor drain pipe	Ø25 mm	
Max. pipe length (A)	65 m	
Max. level difference (B)	30 m	

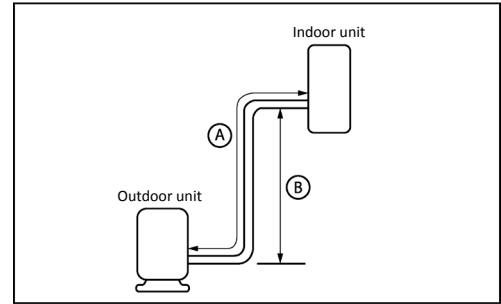


DIMENSIONS & WEIGHT INDOOR

Model	KPD-140 DR11.1
Width	1.200 mm
Height	300 mm
Depth	874 mm
Weight	47,60 kg


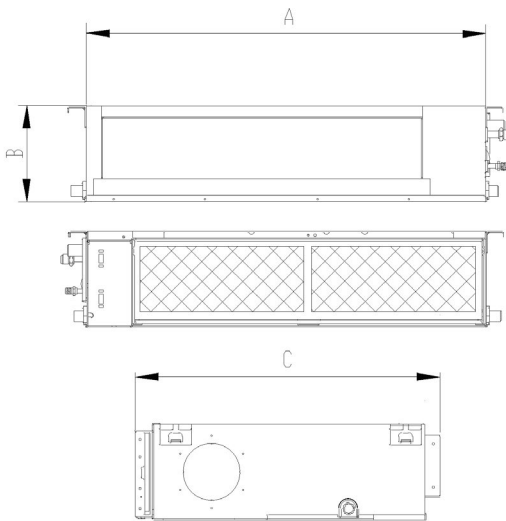


DIMENSIONS & WEIGHT OUTDOOR

Model	KUEC-140 DTN10
Width	1.394 mm
Height	568 mm
Depth	783 mm
Weight	177 kg

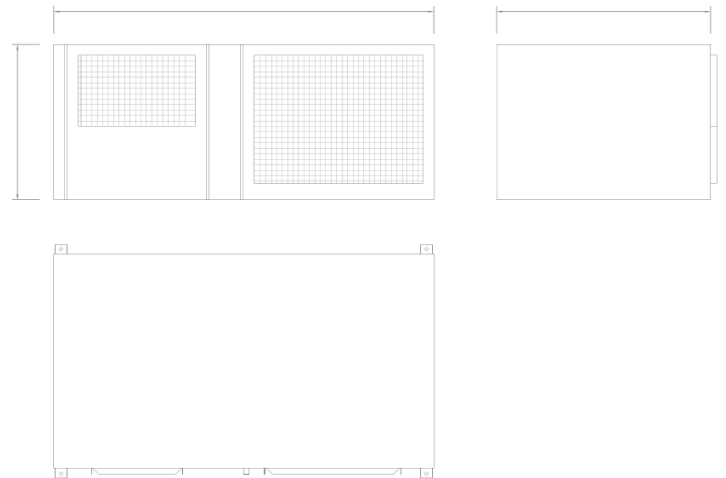


INSTALLATION

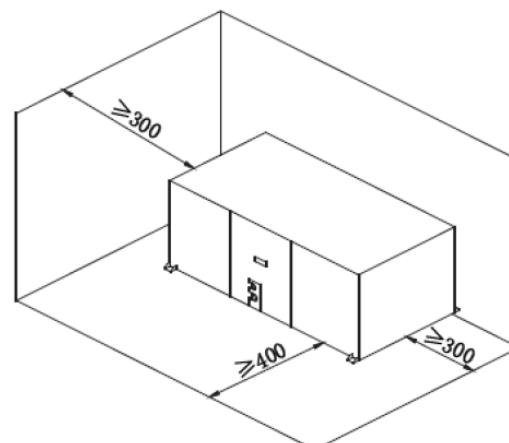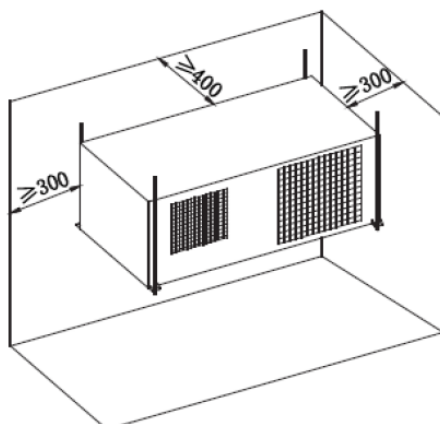

Ducts

PRODUCT SHEET

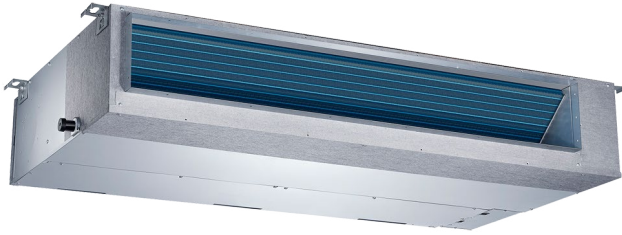

KC-03.1 SPS
Recommended controller




Product certified by:



FEATURES

Model	KPDC-160 DTN11
Cooling capacity	16 kW
Cooling power input	6.281 W
Heating capacity	175 kW
Heating power input	5.775 W
ErP Classification cold/heat	160 Pa
Airflow (indoor)	2.120/2.350/2.600 m ³ /h
Sound pressure (indoor)	36/38,90/42,30 dB(A)
Airflow (outdoor)	3.600 m ³ /h
Sound pressure (outdoor)	64 dB(A)
Power supply	380-415 V / 3 / 50 Hz
Max. input	15 A
Power wiring (indoor)	(2+T)x2,50 mm ²
Power wiring (outdoor)	(4+T)x4 mm ²
Communication wiring	2x1,50 mm ²
Com. bus shielded	3x1,50 mm ²

WIRING DIAGRAM

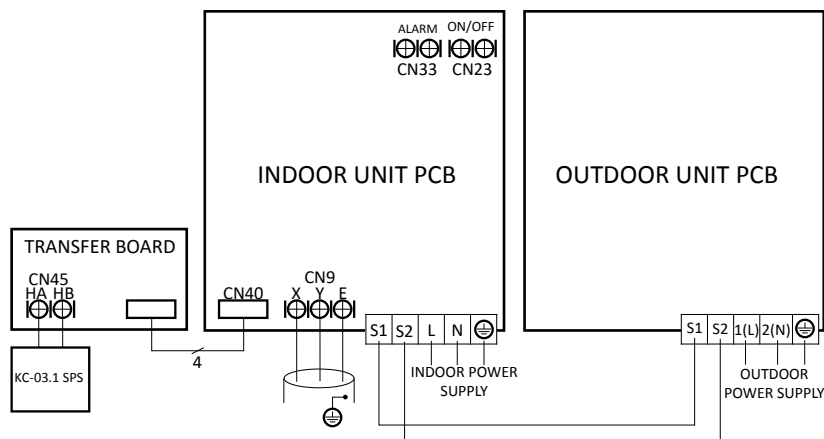


NOTES:

- (1) The data and specifications present in this sheet may vary without notice.
 (2) The images on this sheet are indicative and may be different from the final machine.


COOLING CONNECTION

Model	KPDC-160 DTN11	
Refrigerating pipes	Ø3/8" / Ø5/8"	
Refrigerant charge / Additional charge	4,30 kg / 0,03 kg	
Indoor drain pipe	Ø25 mm	
Max. pipe length (A)	65 m	
Max. level difference (B)	30 m	

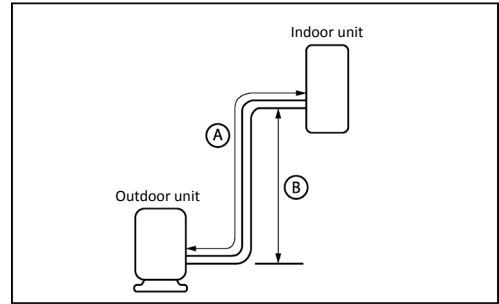


DIMENSIONS & WEIGHT INDOOR

Model	KPD-160 DR11.1
Width	1.200 mm
Height	300 mm
Depth	874 mm
Weight	47,60 kg

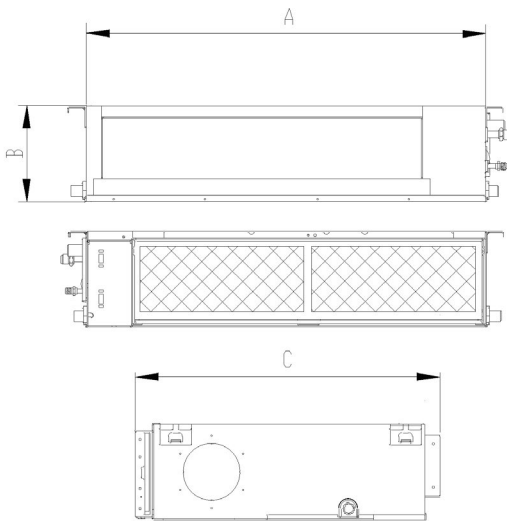

DIMENSIONS & WEIGHT OUTDOOR

Model	KUEC-160 DTN10
Width	1.394 mm
Height	568 mm
Depth	783 mm
Weight	177 kg

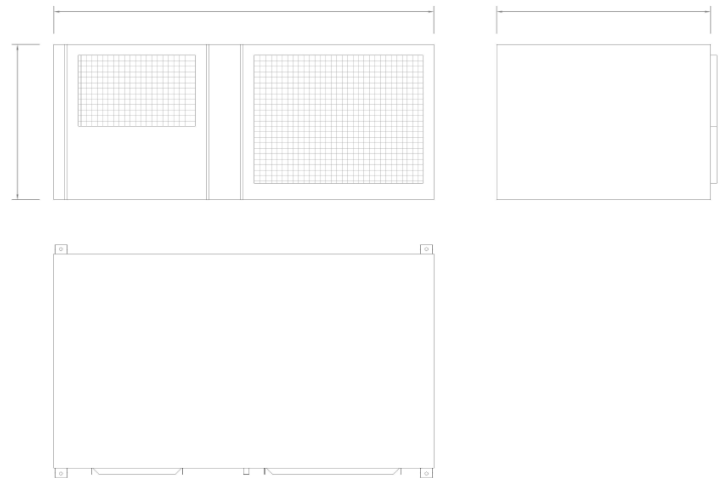

INSTALLATION

