

Cassette 600x600

4 Pipes



KI-04 S
Recommended controller


Product certified by:  



FEATURES

Model	KFC-CI-4T-300D1	KFC-CI-4T-500D1
Cooling capacity L/H	1,49 / 2,16 kW	2,30 / 3,10 kW
Heating capacity L/H	2,08 / 3,13 kW	2,83 / 3,94 kW
Power input L/H	14 / 24 W	20 / 42 W
Airflow L/M/H	295/395/493 m ³ /h	425/526/673 m ³ /h
Water flow cooling H	0,26 / 0,37 m ³ /h	0,39 / 0,53 m ³ /h
Water flow heating H	0,18 / 0,27 m ³ /h	0,24 / 0,34 m ³ /h
Evaporator pressure drop cool. L/H	9,30 / 17,40 kPa	10,30 / 16,80 kPa
Evaporator pressure drop heat. L/H	11,30 / 23,50 kPa	14,50 / 26,80 kPa
Hydraulic connections cool.	Ø3/4"	Ø3/4"
Hydraulic connections heat.	Ø1/2"	Ø1/2"
Power supply	220-240 V / 1 / 50 Hz	
Power wiring	(2+T)x2,50 mm ²	




WIRING DIAGRAM

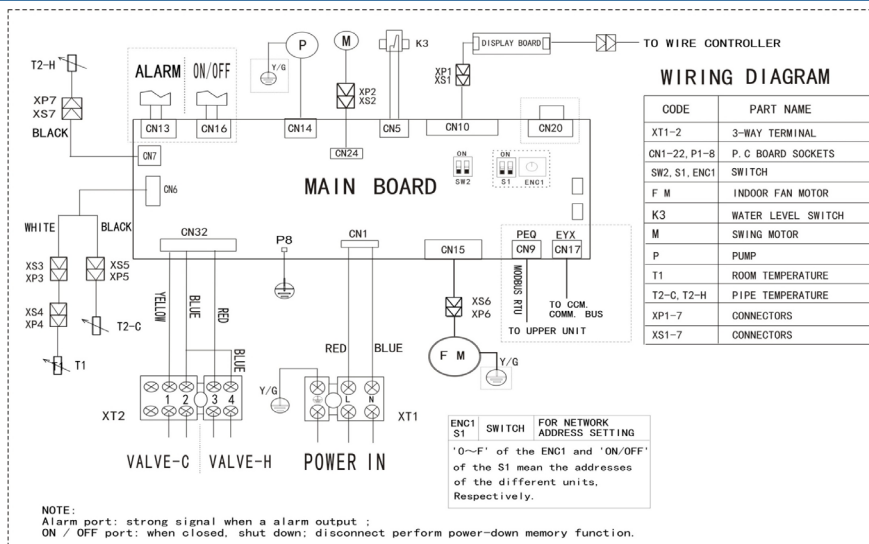

NOTES:
(1) The data and specifications present in this sheet may vary without notice.
(2) The images on this sheet are indicative and may be different from the final machine.

DIMENSIONS & WEIGHT OF INDOOR UNIT

Model	Width	Height	Depth	Weight
KFC-CI-4T-300D1	575 mm	261 mm	575 mm	16,50 kg
KFC-CI-4T-500D1				

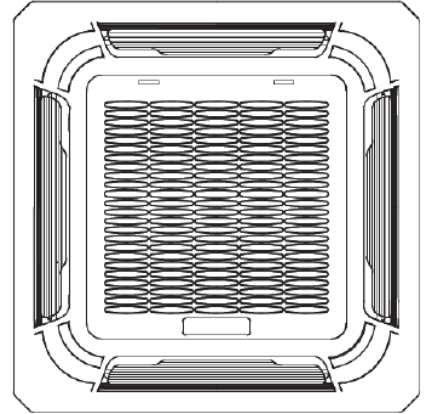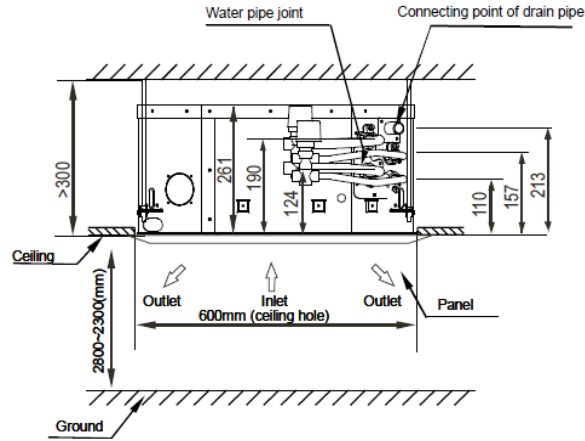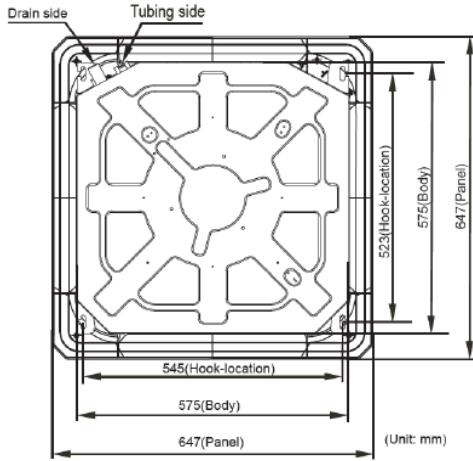

DIMENSIONS & WEIGHT OF PANEL

Model	Width	Height	Depth	Weight
KCI-ART FLUX W	647 mm	50 mm	647 mm	2,50 kg