

Double Flow Console

KSDF-28 DN4.0 / KSDF-36 DN4.0 / KSDF-45 DN4.0

PRODUCT SHEET



KI-04 S

Recommended controller




Product certified by: **CE**



FEATURES

Model	KSDF-28 DN4.0	KSDF-36 DN4.0	KSDF-45 DN4.0
Cooling capacity	2,80 kW	3,60 kW	4,50 kW
Heating capacity	3,20 kW	4 kW	5 kW
Power input	20 W	25 W	35 W
Airflow	229/286/355/430/ 456/482/510 m³/h	229/286/355/430/ 456/482/510 m³/h	400/436/478/478/ 561/614/660 m³/h
Sound pressure	27/29/31/33/ 35/37/39 dB(A)	27/29/31/33/ 35/37/39 dB(A)	36/36/37/39/ 40/41/42 dB(A)
Pipe diameter	Ø1/4" / Ø1/2"	Ø1/4" / Ø1/2"	Ø1/4" / Ø1/2"
Drain tube diameter	Ø16 mm	Ø16 mm	Ø16 mm
Power supply	220-240 V / 1 / 50 Hz		
Max. input	15 A	15 A	15 A
Power wiring	(2+T)x2,50 mm²	(2+T)x2,50 mm²	(2+T)x2,50 mm²
Shielded communication wiring	3x0,75 mm²	3x0,75 mm²	3x0,75 mm²


WIRING DIAGRAM

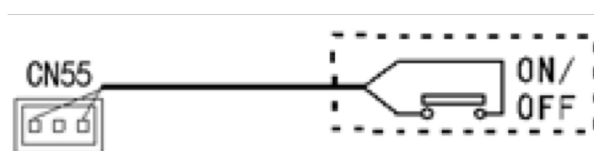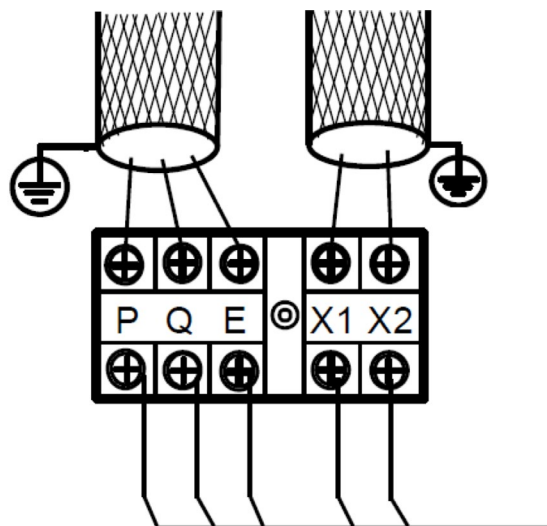

Power supply terminal

NOTES:
(1) The data and specifications present in this sheet may vary without notice.
(2) The images on this sheet are indicative and may be different from the final machine.

DIMENSIONS & WEIGHT

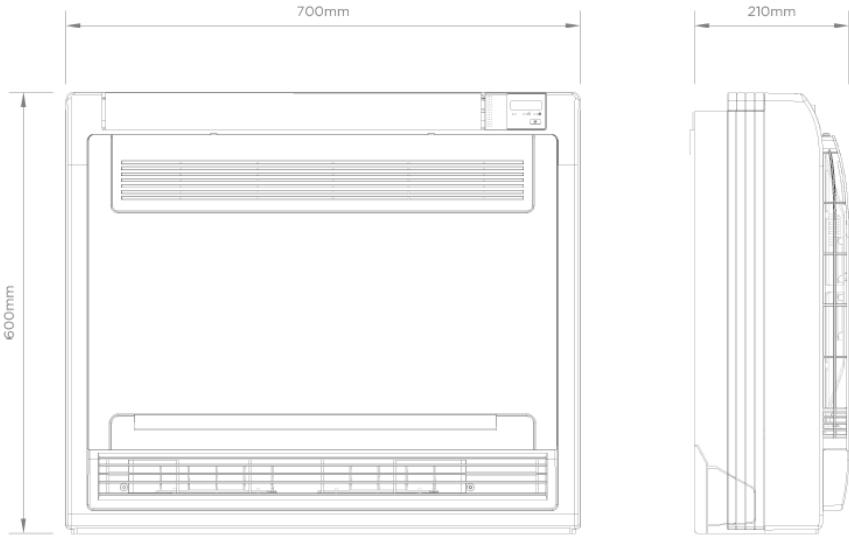Model	KSDF-28 DN4.0	KSDF-36 DN4.0	KSDF-45 DN4.0
			
Weight	15 kg	15 kg	15 kg

INSTALLATION

