

One Way Cassette


KCOF-22 DN4.0 / KCOF-36 DN4.0 / KCOF-71 DN4.0

PRODUCT SHEET



KI-04 S




Recommended controller

 Product certified by: 


FEATURES

Model	KCOF-22 DN4.0	KCOF-36 DN4.0	KCOF-71 DN4.0
Cooling capacity	2,20 kW	3,60 kW	7,10 kW
Heating capacity	2,40 kW	4 kW	8 kW
Power input	25 W	30 W	60 W
Airflow	275/312/360/404/ 448/482/523 m ³ /h	315/364/420/456/ 492/531/573 m ³ /h	592/637/689/749/ 815/873/933 m ³ /h
Sound pressure	30/31/32/34/ 35/36/37 dB(A)	34/35/35/36/ 37/38/39 dB(A)	37/38/39/41/ 42/43/44 dB(A)
Pipe diameter	Ø1/4" / Ø1/2"	Ø1/4" / Ø1/2"	Ø3/8" / Ø5/8"
Drain tube diameter	Ø32 mm	Ø32 mm	Ø32 mm
Power supply	220-240 V / 1 / 50 Hz		
Max. input	15 A	15 A	15 A
Power wiring	(2+T)x2,50 mm ²	(2+T)x2,50 mm ²	(2+T)x2,50 mm ²
Shielded communication wiring	3x0,75 mm ²	3x0,75 mm ²	3x0,75 mm ²

WIRING DIAGRAM

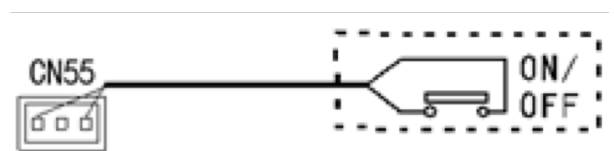
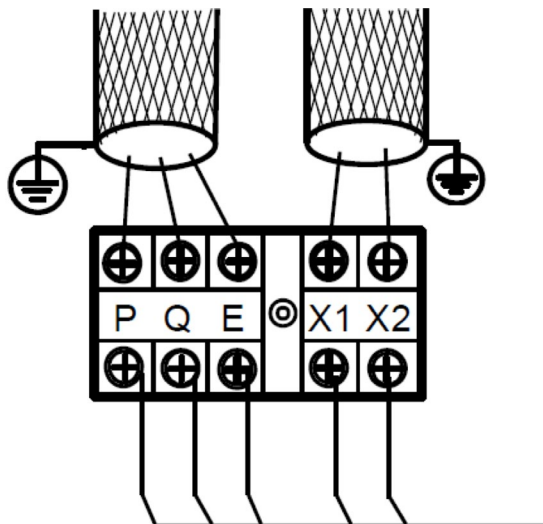


Power supply terminal

NOTES:


- (1) The data and specifications present in this sheet may vary without notice.
- (2) The images on this sheet are indicative and may be different from the final machine.

DIMENSIONS & WEIGHT

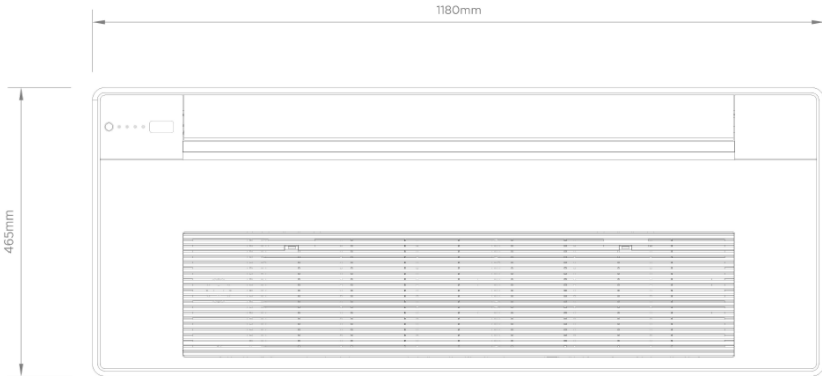Model	KCOF-22 DN4.0	KCOF-36 DN4.0
		



Weight	11,80 kg	12,30 kg
--------	----------	----------

Model	KCOF-71 DN4.0
-------	---------------

	
--	---

Weight	17,60 kg
--------	----------

INSTALLATION

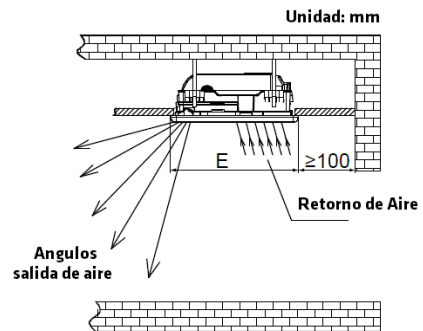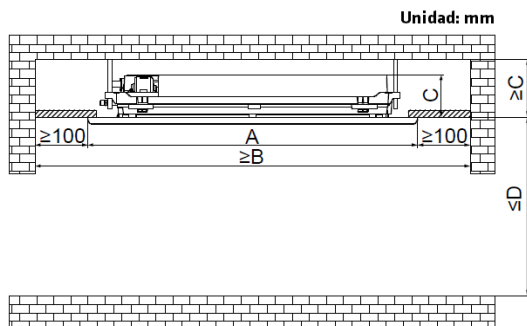

Model	KCOF-22 DN4.0	KCOF-36 DN4.0	KCOF-71 DN4.0
A	1.180 mm	1.180 mm	1.350 mm
B	1.380 mm	1.380 mm	1.550 mm
C	153 mm	153 mm	189 mm
D	3.200 mm	3.200 mm	489 mm
E	465 mm	465 mm	505 mm