

# Ceiling/Floor


# PRODUCT SHEET

**KPCF-56 DN4.0 W / KPCF-90 DN4.0 W / KPCF-140 DN4.0 W**



KI-04 S

Recommended controller


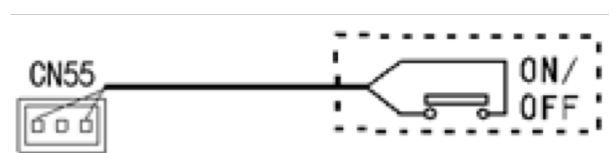
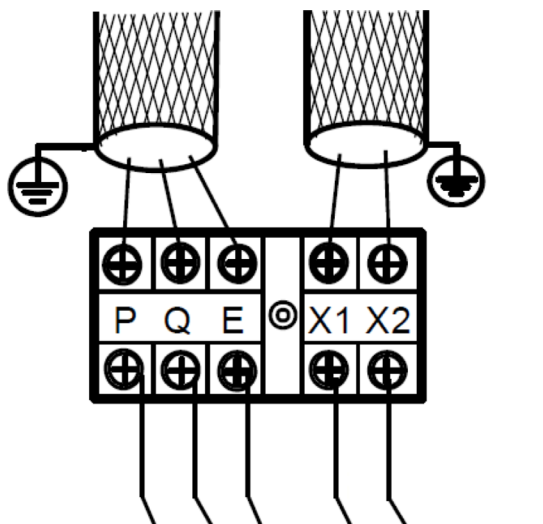
Product certified by: 



## FEATURES

Model	KPCF-56 DN4.0 W	KPCF-90 DN4.0 W	KPCF-140 DN4.0 W
Cooling capacity	5,60 kW	9 kW	14 kW
Heating capacity	6,30 kW	10 kW	15 kW
Power input	115 W	130 W	180 W
Airflow	720/755/792/830/ 860/895/930 m <sup>3</sup> /h	1.050/1.085/1.130/1.170/ 1.210/1.245/1.280 m <sup>3</sup> /h	1.580/1.620/1.660/1.700/ 1.765/1.830/1.890 m <sup>3</sup> /h
Sound pressure	38/38/39/41/ 41/42/43 dB(A)	40/41/42/43/ 43/44/45 dB(A)	42/43/44/45/ 45/46/47 dB(A)
Pipe diameter	Ø3/8" / Ø5/8"	Ø3/8" / Ø5/8"	Ø3/8" / Ø5/8"
Drain tube diameter	Ø16 mm	Ø16 mm	Ø16 mm
Power supply	220-240 V / 1 / 50 Hz		
Max. input	15 A	15 A	15 A
Power wiring	(2+T)x2,50 mm <sup>2</sup>	(2+T)x2,50 mm <sup>2</sup>	(2+T)x2,50 mm <sup>2</sup>
Shielded communication wiring	3x0,75 mm <sup>2</sup>	3x0,75 mm <sup>2</sup>	3x0,75 mm <sup>2</sup>

## WIRING DIAGRAM

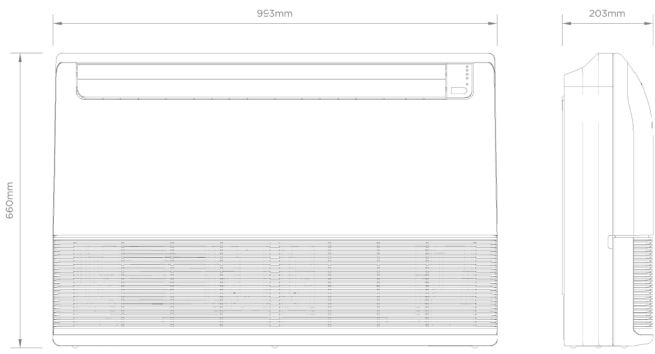

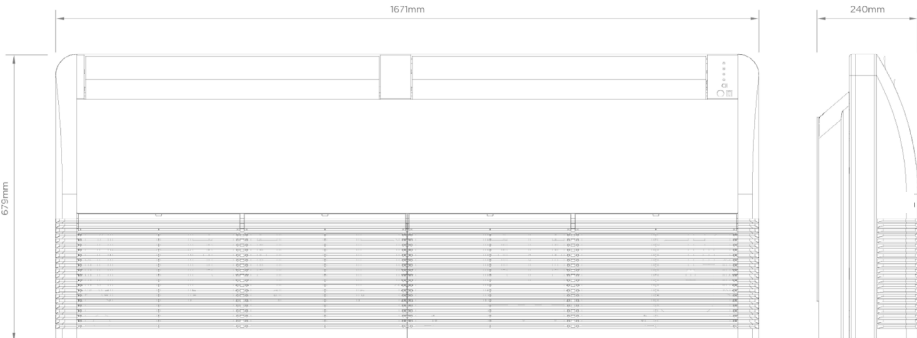


Power supply terminal

NOTES:

- (1) The data and specifications present in this sheet may vary without notice.  
 (2) The images on this sheet are indicative and may be different from the final machine.

## DIMENSIONS & WEIGHT

Model	Weight	
<b>KPCF-56 DN4.0 W</b>	28 kg	
<b>KPCF-90 DN4.0 W</b>	35 kg	
<b>KPCF-140 DN4.0 W</b>	48 kg	

## INSTALLATION

