

Domestic Hot Water Tanks

PRODUCT SHEET



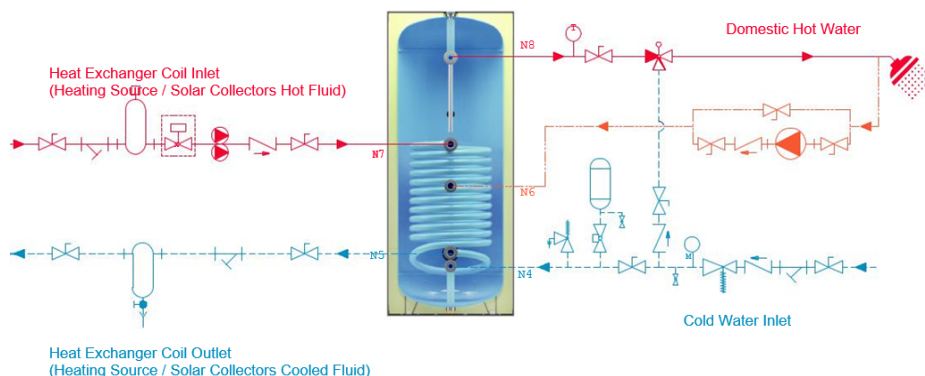
Product certified by:



FEATURES

| Model | | BSX270 | BSX475 |
|-----------------------|-------------------------------------|------------------------------------|--------------------|
| Characteristics | Capacity | 270 L | 475 L |
| | Height / Diameter | 1.209 mm / Ø700 mm | 1.800 mm / Ø750 mm |
| | Net weight | 136 kg | 212 kg |
| | Max. working pressure | 10 bar | |
| | Test pressure | 13 bar | |
| Materials | Manufacture in | Enameled steel (DIN4753 standard) | |
| | Outer material | Galvanized steel painted in white | |
| | Insulation | Injected polyurethane foam (50 mm) | |
| | Cathodic protection (anticorrosion) | Magnesium anode rod and tester | |
| Heat exchanger | Type | Enameled steel coil | |
| | Exchange surface | 2,5 m ² | 3,1 m ² |
| Hydraulic connections | Cold water inlet | 1" | |
| | DHW outlet | 1" | |
| | Coil connections (inlet & outlet) | 1 - 1/4" | |
| | Recirculation | 1" | |
| | Connection position | Side | |
| Other data | Electric heater / Connection | Not included / 1 - 1/2" | |
| | Temperature indicator | Included analogic thermometer | |
| | Sensor sleeves | 3x (Ø13x100 mm) | |
| | Maintenance plate size | Ø280 mm | |

INSTALLATION


NOTES:

- (1) The data and specifications present in this sheet may vary without notice.
- (2) The images on this sheet are indicative and may be different from the final machine.