

# Floor Standing


# PRODUCT SHEET

KSEF-22 DN4.1 / KSEF-36 DN4.1 / KSEF-56 DN4.1



KI-04 S

Recommended controller




Product certified by: 



## FEATURES

Model	KSEF-22 DN4.1	KSEF-36 DN4.1	KSEF-56 DN4.1
Cooling capacity	2,20 kW	3,60 kW	5,60 kW
Cooling power input	35 W	40 W	45 W
Heating capacity	2,40 kW	4,00 kW	6,30 kW
Heating power input	35 W	40 W	45 W
Airflow	430/441/452/464/ 475/486/498 m <sup>3</sup> /h	407/424/441/458/ 474/491/508 m <sup>3</sup> /h	653/680/706/732/ 758/785/811 m <sup>3</sup> /h
Sound pressure	35/35/36/36/36/37/37 dB(A)	34/35/36/36/37/38/38 dB(A)	36/37/37/38/38/38/39 dB(A)
Pipe diameter	Ø1/4" / Ø1/2"	Ø1/4" / Ø1/2"	Ø1/4" / Ø1/2"
Drain tube diameter	Ø18,50 mm	Ø18,50 mm	Ø18,50 mm
Power supply	220-240 V / 1 / 50 Hz		
Max. input	15 A	15 A	15 A
Power wiring	(2+T)x2,50 mm <sup>2</sup>	(2+T)x2,50 mm <sup>2</sup>	(2+T)x2,50 mm <sup>2</sup>
Shielded communication wiring	3x0,75 mm <sup>2</sup>	3x0,75 mm <sup>2</sup>	3x0,75 mm <sup>2</sup>

## WIRING DIAGRAM

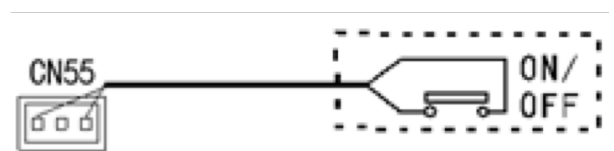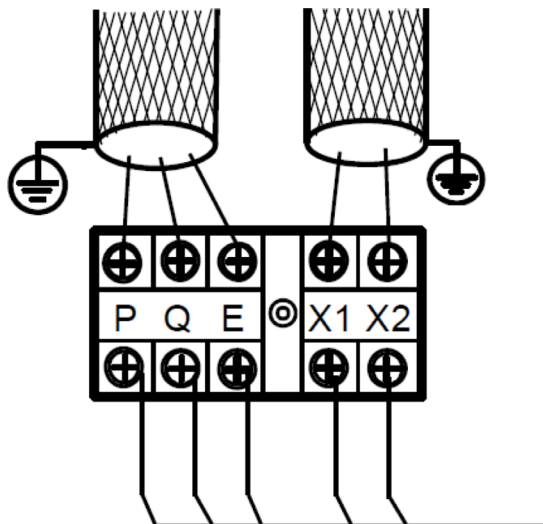


Power supply terminal

NOTES:  
 (1) The data and specifications present in this sheet may vary without notice.  
 (2) The images on this sheet are indicative and may be different from the final machine.

## DIMENSIONS & WEIGHT

Model	KSEF-22 DN4.1	KSEF-36 DN4.1	KSEF-56 DN4.1
A	1.020 mm	1.020 mm	1.360 mm
B	495 mm	495 mm	591 mm
C	764 mm	764 mm	1.104 mm
D	375 mm	375 mm	391 mm
Weight	22,50 kg	23,30 kg	31,80 kg

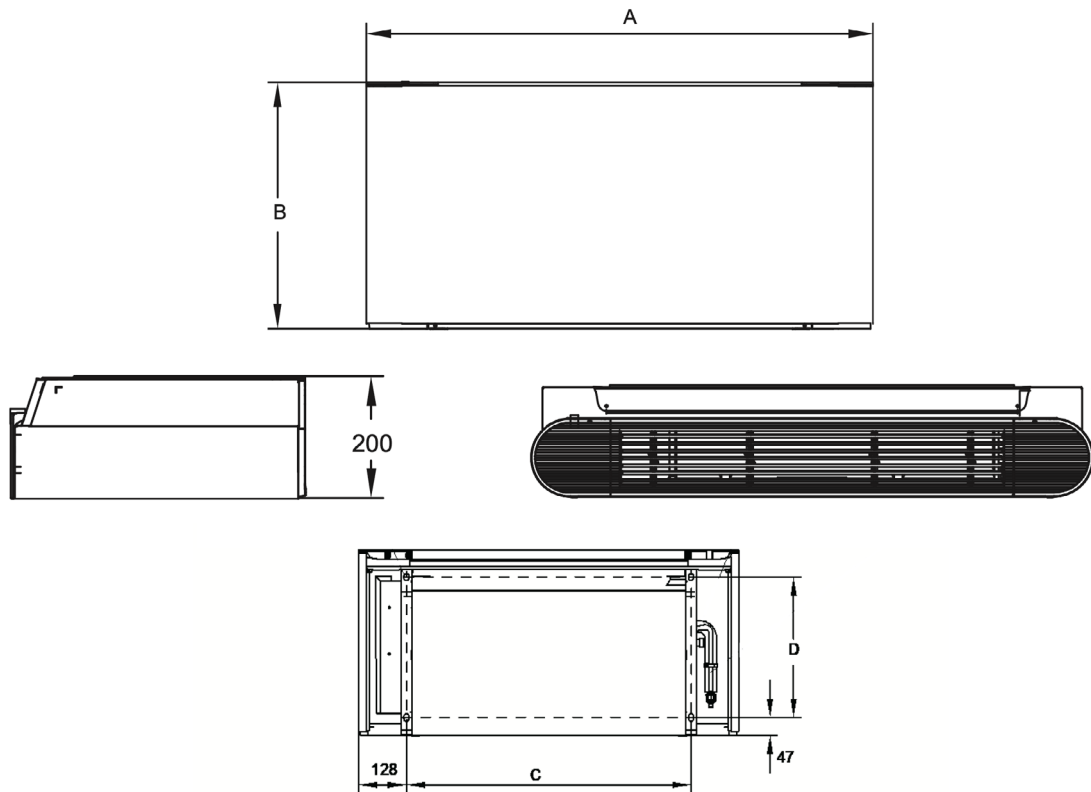

## INSTALLATION

