

2-ZONE KIT

PRODUCT SHEET




2 available models, one model for 2 high temperature zones and another model for both high and low temperature zones (with mixing valve).

- Each kit includes 2 YONOS PARA RS 25/1-6 180 water pumps, check valves, ball valves and temperature probes. All connected in a unique body.
- The HIGH and LOW temperature zone model also includes a DN25 mixing valve.

FEATURES

Model	KIRE2HX	KIRE2HLX
Zones	2 High temp.	1 High + 1 Low temp.
Max. working temperature		110 °C
Max. working pressure		6
Max flow rate. (ΔP 10 KPa)	2.600,0	1.600,0
Max. heating power (ΔT 20)	60,5	37,2
Circulation unit material		OT58 / Cu
Supply voltage of pump		230 V - 50 Hz
DN20 manifold max flow		3.000,0
Manifold material		Steel ST37.1
Insulation material		EPP 60 g/l
Painting		RAL 9004


INSTALLATION

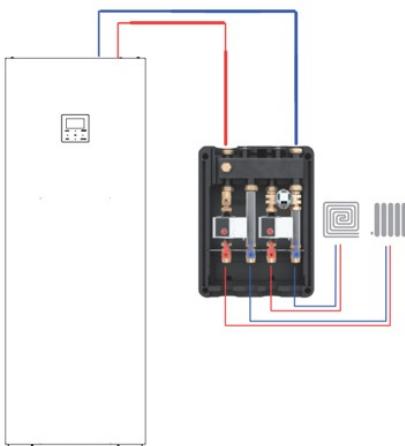

NOTES:


- (1) The data and specifications present in this sheet may vary without notice.
- (2) The images on this sheet are indicative and may be different from the final machine.

DIMENSIONS

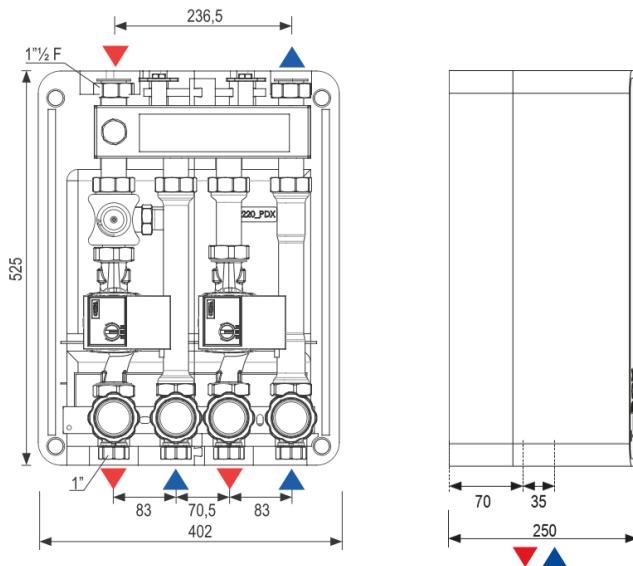


CHARACTERISTIC CURVES

Manifold:

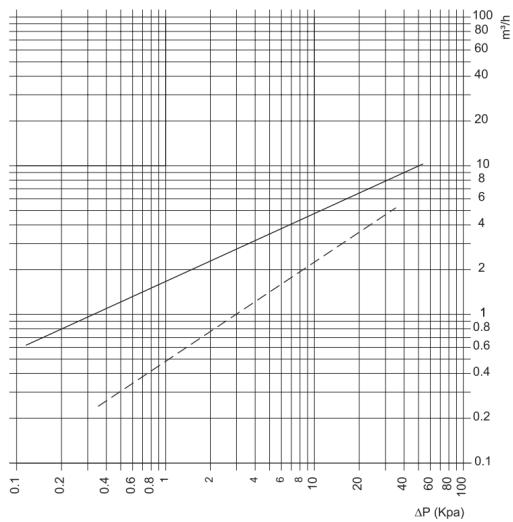

High temperature water pump:

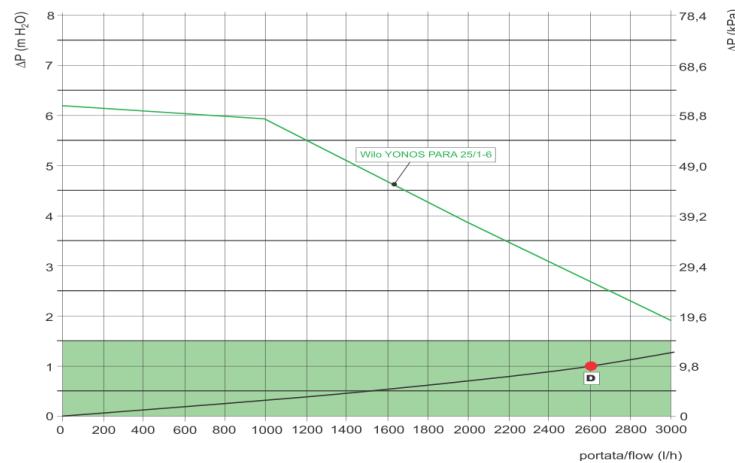

Low temperature water pump (mixed water):

