

Medium Pressure Ducts

PRODUCT SHEET



HID-Ti10
Recommended thermostat
for 2 and 4 pipes

Product certified by: 




FEATURES 2 TUBES

Model		FMDE-130	FMDE-220	FMDE-230	FMDE-240	FMDE-330
Cooling capacity H	kW	7,59	10,39	13,01	15,16	17,30
Sensitive cooling capacity H	kW	5,66	8,18	10,04	11,21	13,40
Heat output H	kW	8,03	11,81	14,52	15,34	19,52
Air flow rate H	m³/h	1230	2130	2330	2230	3130
Net weight	kg	36	49	51	54	66
Max. static pressure	Pa	120	120	120	120	120
Cooling/hot water connections	inch	3/4"	3/4"	3/4"	3/4"	3/4"

FEATURES 4 TUBES

Model		FMDE-131	FMDE-221	FMDE-231	FMDE-321	FMDE-331
Cooling capacity H	kW	7,34	10,06	12,51	13,3	16,71
Sensitive cooling capacity H	kW	5,46	7,92	9,63	10,49	12,9
Heat output H	kW	6,3	10,41	10,94	13,88	14,68
Air flow rate low/average/high	m³/h	1170	2030	2200	2700	2960
Net weight	kg	38	52	54	68	70
Max. static pressure	Pa	120	120	120	120	120
Cooling/hot water connections	inch	3/4" - 1/2"	3/4" - 1/2"	3/4" - 1/2"	3/4" - 1/2"	3/4" - 1/2"

NOTES:
(1) The data and specifications present in this sheet may vary without notice.
(2) The images on this sheet are indicative and may be different from the final machine.

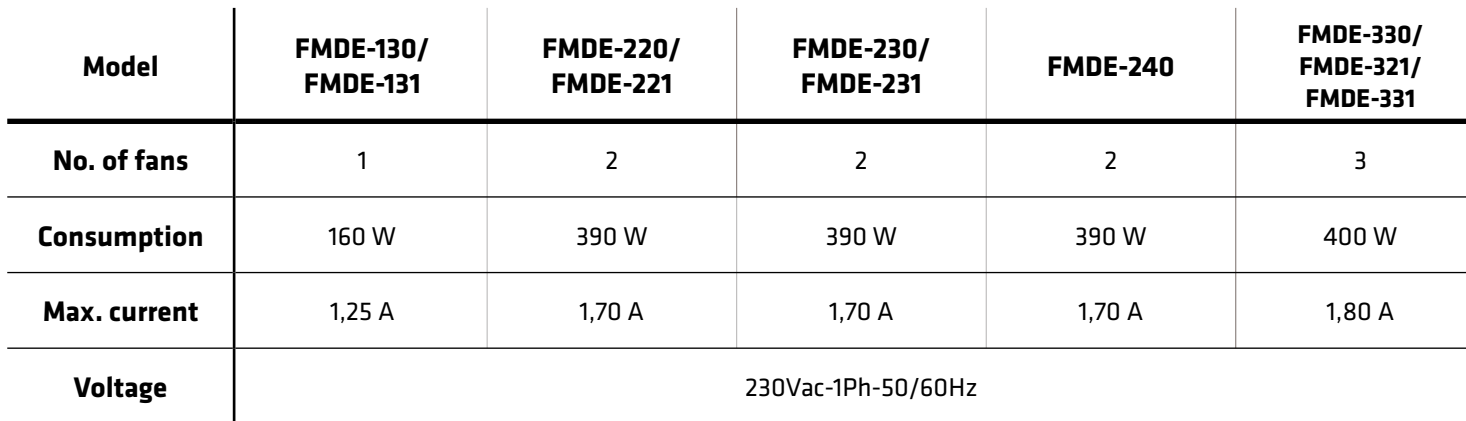

*With the K1 panel, the width and height are increased by 40mm.