

Cassette 600x600

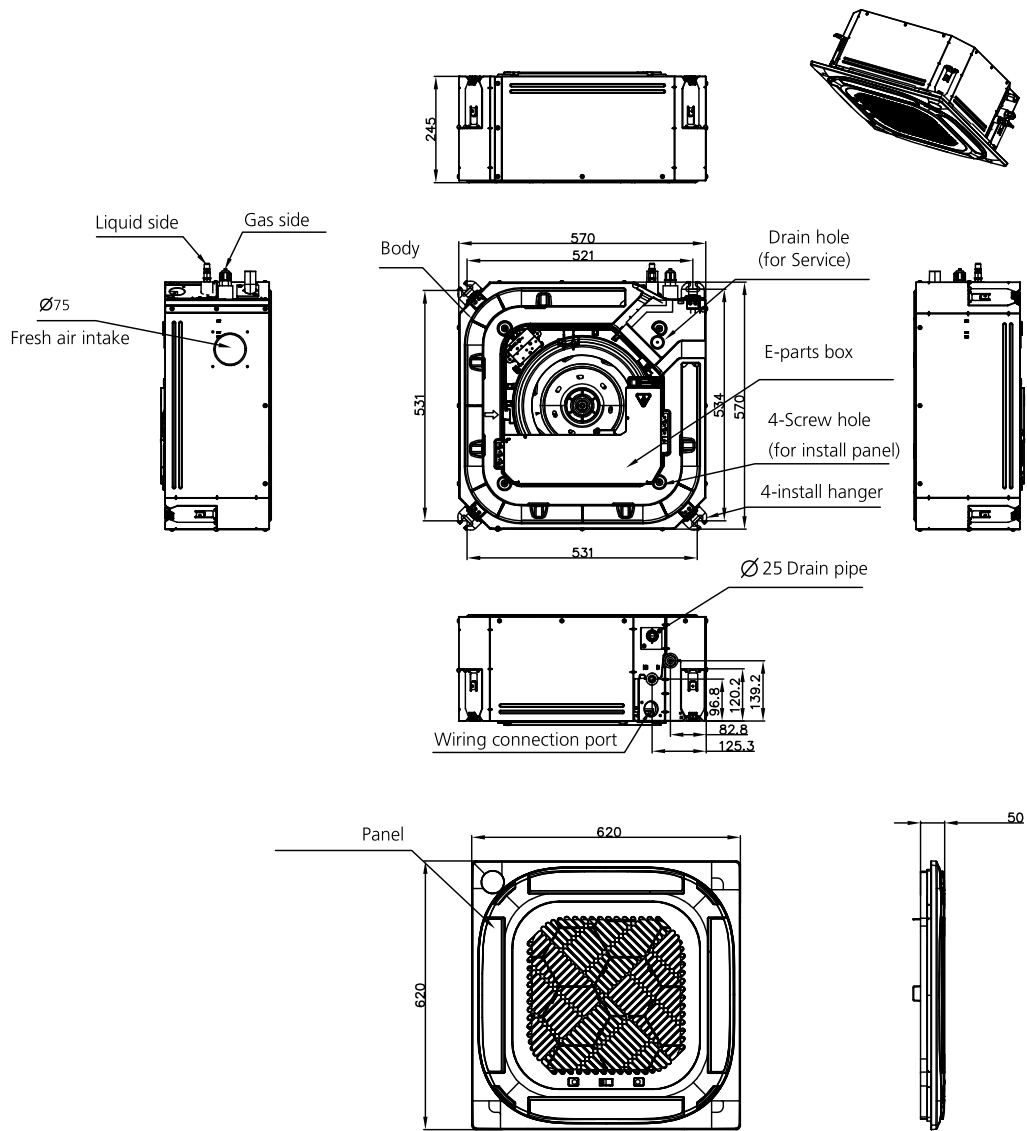

 KID-06 S
Standard


Technical documentation	Download
User Manual	PDF
Controller Manual	PDF
Declaration of Conformity	PDF
ErP	PDF
Dimensions	DWG
Communication diagrams	PDF

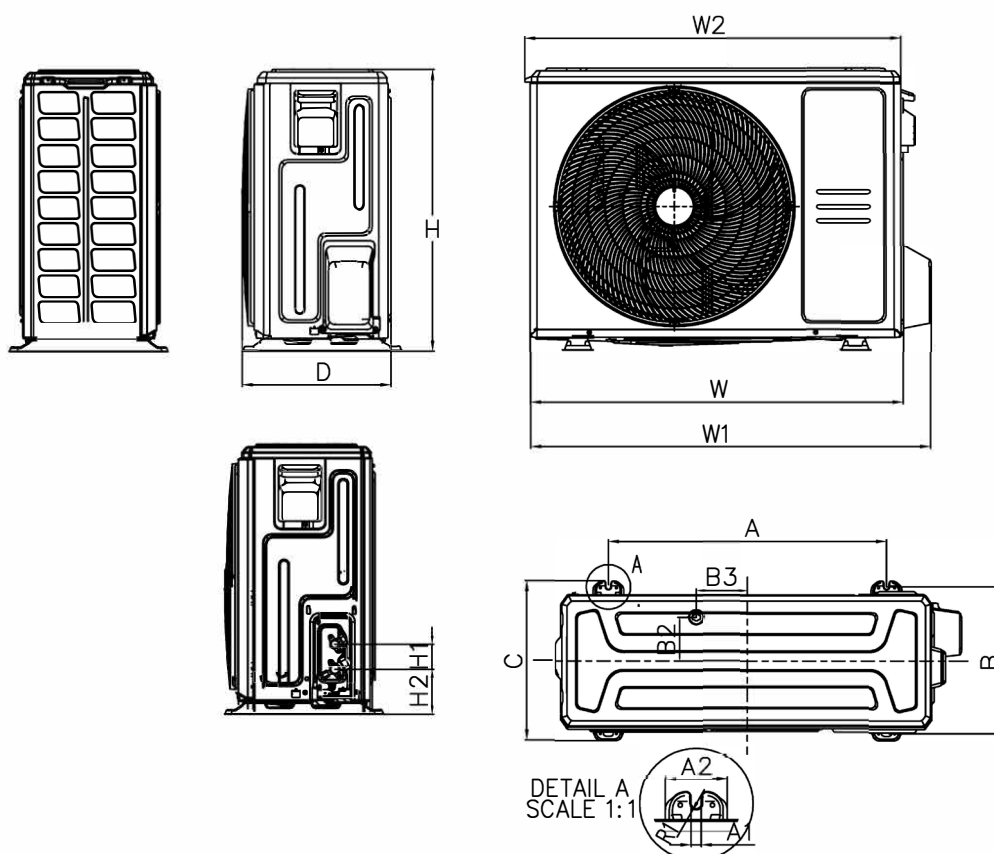
Set Model		KCIA-26 DVR15	KCIA-35 DVR15	KCIA-52 DVR15
> Set				
Cooling capacity rated	kW	2.63	3.52	5.28
Cooling capacity min. / max.	kW	0.35 / 3.07	0.85 / 4.16	2.9 / 5.59
Heating capacity rated	kW	3.07	3.81	5.57
Heating capacity min. / max.	kW	0.90 / 3.51	0.47 / 4.34	2.37 / 6.1
Heating capacity rated at -7°C	kW	2.30	2.83	4.02
Cooling input rated	W	800	1015	1550
Cooling input min. / max.	W	145 / 1100	160 / 1450	720 / 2040
Heating input rated	W	1000	1020	1560
Heating input min. / max.	W	300 / 1300	125 / 1390	700 / 1950
Heating input rated at -7°C	W	1040.72	1341.23	1703.39
EER		3.29	3.47	3.41
COP		3.07	3.73	3.57
COP at -7°C		2.21	2.11	2.36
SEER		6.3 - A++	6.8 - A++	6.5 - A++
SCOP		4.1 - A+	4.1 - A+	4.1 - A+
Shielded communication wiring	mm ²	4x1	4x1	4x1
> Indoor unit				
Power supply	V/ph/Hz	With communication	With communication	With communication
Communication wiring	mm ²	4x1	4x1	4x1
Width / Height / Depth	mm	570 / 245 / 570	570 / 245 / 570	570 / 245 / 570
Net weight	kg	16.2	16.2	16.2
Air flow low / medium / high	m ³ /h	330 / 520 / 620	330 / 520 / 620	300 / 540 / 660
Sound pressure	dB(A)	25.5 / 31.5 / 38.5 / 42	25.5 / 31.5 / 38.5 / 42	25 / 31.5 / 41 / 44
Sound power level	dB(A)	55	55	59
Panel; Model		KPA-03B 600x600	KPA-03B 600x600	KPA-03B 600x600
Panel; Width / Height / Depth	mm	620 / 50 / 620	620 / 50 / 620	620 / 50 / 620
Panel; Net weight	kg	2.7	2.7	2.7
> Outdoor unit				
Power supply	V/ph/Hz	220-240/1/50	220-240/1/50	220-240/1/50
Power wiring	mm ²	(2+T)x1,5	(2+T)x1,5	(2+T)x1,5
Circuit breaker		D20	D20	D20
Width / Height / Depth	mm	765 / 555 / 303	765 / 555 / 303	805 / 554 / 303
Net weight	kg	26.6	26.6	32.5
Air flow	m ³ /h	2000	2000	2100
Sound pressure	dB(A)	54	54	59
Sound power level	dB(A)	61	61	62
> Refrigerant				
Type refrigerant		R-32	R-32	R-32
GWP		675	675	675
Refrigerant charge	kg	0.65	0.71	1.15
t CO ₂ eq	tCO ₂	0.44	0.48	0.78
Pre-charge meters	m	5	5	5
Supplementary charge	kg/m	0.012	0.012	0.012
Liquid / Gas pipe diameter	inch	1/4" / 3/8"	1/4" / 3/8"	1/4" / 3/8"
Piping total length	m	25	25	25
Vertical piping max. length	m	10	10	10
> Working range				
Outdoor ambient temperature for heating min. / max.	°C	-15 / 24	-15 / 24	-15 / 24
Outdoor ambient temperature for cooling min. / max.	°C	-15 / 50	-15 / 50	-15 / 50
Provisional data				

Cooling and heating capacity. Cooling and heating input. Energy efficiency: Data for standard conditions. The actual operation conditions depend on the place in which the equipment has been installed and the use made of it. **Sound pressure:** Measurement of the sound pressure is taken using a semi-anechoic chamber at a distance of 1 m from the machine. **Power wiring:** The power wiring is up to 10 m approximately. It must be calculated more precisely for each installation. **Supplementary charge:** The initial factory charge of the machines is valid for the first 5 m (liquid line). For greater distances, a supplementary charge is required, in accordance with the formula 0.012 kg/m × (L-5) in the liquid line is 1/4". For greater diameters, use 0.024 kg/m × (L-5). **Compatible controllers:** The units can integrate one of the controllers from the table or the one recommended by Kaysun. For further information regarding compatibility, see the chapter on Controllers. **NOTE:** Before installing these units, current legislation regarding refrigerant gases must be consulted.

Cassette 600x600



Cassette 600x600



Platform	W	W1	W2	D	H	A	B	C	H1	H2	A1	A2	R1	B2	B3
X1	720	790	727	270	495	452	255	281	60	87	11.7	49	6	76.5	33
X2	765	835	784	303	555	452	286	314	60	93	10	62	5	76	18
X3	805	874	815	330	554	511	317	346	60	95	10	58	6.5	105	49
X4	890	955	895	342	673	663	354	380	60	108	12	74	6	52	61
X6	980	1073	/	415	975	616	397	440	60	114	12	76	6	111	95
D	946	1030	/	410	810	673	403	455	60	108	24	73	6	95	10

	2,6kW (09) 3,5kW (12)	5,2kW (18)	7,1kW (24)	9kW (30) 10,5kW (36) 12,5kW (42)	14kW (48) 16kW (55)
ODUs	X2	X3	X4	D	X6